

Addendum

ADDENDUM


The Memoir Class

for

Configurable Typesetting

User Guide

Peter Wilson



© 2002–2007, Peter R. Wilson
All rights reserved

The Herries Press, Normandy Park, WA.

Printed in the World

The paper used in this publication may meet the minimum requirements of the American National Standard for Information Sciences — Permanence of Paper for Printed Library Materials, ANSI Z39.48–1984.

10 09 08 07 06 05 04 03 02 22 21 20 19 18 17

First edition:	November 2002
Second impression, with minor additions	December 2002
Third impression, with additions	January 2003
Fourth impression, with additions	January 2003
Fifth impression, with minor additions	February 2003
Sixth impression, with minor additions	February 2003
Seventh impression, with minor additions	April 2003
Eighth impression, with minor additions	June 2003
Ninth impression, with minor additions	July 2003
Tenth impression, with minor additions	September 2003
Eleventh impression, with minor additions	November 2003
Second edition:	September 2005
Twelfth impression, with minor additions	October 2005
Thirteenth impression, with minor additions	November 2005
Fourteenth impression, with minor additions	January 2006
Fifteenth impression, with minor additions	August 2006
Sixteenth impression, with minor additions	December 2006
Seventeenth impression, with minor additions	November 2007

addendum, *n.* [L., gerundive of *addere*: see ADD] 1. a thing added or to be added 2. an appendix or supplement to a book, etc. 3. the part of a gear tooth that projects beyond the pitch circle, or the distance that it projects

Webster's New World Dictionary, Second College Edition.

memoir, *n.* [Fr. *mémoire*, masc., a memorandum, memoir, fem., memory < L. *memoria*, MEMORY] 1. a biography or biographical notice, usually written by a relative or personal friend of the subject 2. [*pl.*] an autobiography, usually a full or highly personal account 3. [*pl.*] a report or record of important events based on the writer's personal observation, special knowledge, etc. 4. a report or record of a scholarly investigation, scientific study, etc. 5. [*pl.*] the record of the proceedings of a learned society

Webster's New World Dictionary, Second College Edition.

Short contents

Short contents ·	vii
Contents ·	viii
List of Figures ·	xi
List of Tables ·	xii
Introduction to Edition 1 ·	xiii
Introduction to Edition 2 ·	xv
Acknowledgements ·	xvii
1 Corrections and omissions ·	1
2 Page layout ·	7
3 Document divisions ·	15
4 Front and rear ·	33
5 Boxes and environments ·	51
6 Captions ·	57
7 Miscellaneous ·	63
Command summary ·	73
Bibliography ·	87
Index ·	89

Contents

Short contents	vii
Contents	viii
List of Figures	xi
List of Tables	xii
Introduction to Edition 1	xiii
Introduction to Edition 2	xv
Acknowledgements	xvii
1 Corrections and omissions	1
1.1 Pagination	1
1.2 Folding paper	1
1.3 Part headings	1
1.4 Appendices	1
1.5 Writing out verbatim	2
1.6 Subcaptions	2
1.7 New list entries	2
1.8 Footnotes and ragged bottom	2
1.9 Package clashes	3
<i>float package 4, caption package 4</i>	
1.10 Bibliography and Index marks	4
2 Page layout	7
2.1 Text height	7
2.2 Side margins	8
2.3 Overfull lines	9
2.4 Sloppybottom	9
2.5 Extra inter-paragraph space	11
2.6 Double spacing	11
2.7 Page styles	13
3 Document divisions	15

3.1	Book headings	15
	<i>Book heading layout 16</i>	
3.2	Part headings	16
3.3	Chapter styles	17
	<i>Reparticle 17, Southall 18, Chappell 19, Demo2 and demo3 19, Additions to the class 21</i>	
3.1	Poem Titles	29
	<i>Main Poem Title layout parameters 30, Detailed Poem Title layout parameters 30</i>	
3.2	Miscellaneous	31
	<i>Chapter precis 31, Division numbering 31</i>	
4	Front and rear	33
4.1	Title page	33
4.2	The ToC	33
	<i>Book ToC entry 37</i>	
4.3	The index	38
4.4	Glossaries	38
4.5	Controlling the glossary	40
	<i>Setting up makeindex 40, Raw input data 40, The listing 43, The glossary for this document 44</i>	
4.6	Endnotes	46
	<i>Changing the appearance 48</i>	
5	Boxes and environments	51
5.1	Sidebars	51
5.2	Side notes	52
5.3	Verse	52
5.4	Boxed verbatims	54
5.5	Lists	54
5.6	Vertical minipage	55
6	Captions	57
6.1	Side captions	57
	<i>Tweaks 58</i>	
6.2	Caption title text	60
7	Miscellaneous	63
7.1	General	63
	<i>Font commands 63, Floats 63, Two simple macros 65, Trim marks 65, Time 65, Vertical centering 66, Checking for XeTeX 66</i>	
7.2	For package writers	66
	<i>Emulating packages 67, Extending a macro 67, Inserting code before and after a file, package or class 67, Checking for etex 69</i>	
7.3	Heading hooks	70
	<i>Documenting LaTeX commands 71</i>	

CONTENTS

Command summary	73
Bibliography	87
Index	89

List of Figures

3.1	The southall chapterstyle	18
3.2	The chappell chapterstyle	20
3.3	The bianchi chapterstyle	22
3.4	The bringhurst chapterstyle	22
3.5	The brotherton chapterstyle	23
3.6	The culver chapterstyle	23
3.7	The dash chapterstyle	24
3.8	The demo2 chapterstyle	25
3.9	The ell chapterstyle	25
3.10	The ger chapterstyle	26
3.11	The lyhne chapterstyle	26
3.12	The madsen chapterstyle	27
3.13	The thatcher chapterstyle	28
3.14	The veelo chapterstyle	28
3.15	The verville chapterstyle	29
4.1	Example endnote listing	47

List of Tables

2.1	Results from sample <code>\textheight</code> adjustments	8
3.1	Division levels	15
4.1	MakeIndex configuration file input parameters	41
4.2	MakeIndex configuration file output parameters	42
6.1	Permitted arguments for some sidecaption related commands	60

Introduction to Edition 1

At the request of users I keep extending the memoir class. The *User Manual* has some 250 or so pages and it is a burden to the author to keep changing it and also for the readers to keep getting new copies, especially when a change can be as small as a sentence or paragraph. Hence I trust that this addendum will suffice until there is enough material to warrant a new edition of the manual.

This addendum applies to the fifth edition of the *User Manual* which describes version 1.2 of the memoir class. The class is currently at version 1.3a with patch version 1.9 or later.

The main extensions and changes to the class and manual include:

- There is more flexibility in typesetting the titles of unnumbered chapters;
- Major extensions for typesetting footnotes;
- Major extensions for indexing, including one column and multiple indexes;
- Major extensions to cropmarks;
- Ability to use `\tableofcontents` and friends multiple times;
- Sheet numbers in addition to page numbers, plus access to the numbers of the last sheet and last page;
- Various methods for formatting numbers;
- Better cooperation with the `chapterbib` and `natbib` packages when they use their `sectionbib` option;
- Sectioning commands can take a second optional argument for header text;
- Section titles, as well as numbers, may be referenced;
- Extra ‘need space’ macros;
- New macros for ‘slashed’ fractions (fractions like $\frac{6}{29}$);
- Extensions to framed boxes;
- Odd page checking extended to apply to non-arabic numbered pages;
- Means of setting ‘optimum’ textwidth;
- More intuitive effects of `\mainmatter` and `\backmatter` when the `article` option is used;
- Control of the spacing of items in the bibliography;
- A ‘fixed’ version of `\marginpar`;
- Extensions for typesetting arrays and tabulars, including continuous tabulars and automatic tabulation;
- As usual, minor glitches have been removed from the code.

Introduction to Edition 2

January 2004 saw a major extension of the memoir class to version 1.6; all the then current patches were folded into the class itself. Edition 6 of the User Manual was released which included the contents of the November 2003 Addendum. Thus, at that time there was no need for either a patch file or the Addendum.

Since then new patches have been made for memoir, fixing problems but adding no new commands. However, in September 2005 a new version, v1.618, of memoir was released which did include some new functions, but not significant enough to warrant a new edition of the User Manual. Edition 2 of the Addendum applies to Edition 6 of the User Manual and covers memoir v1.618 extensions. Further impressions may be released if there are later extensions.

The more major changes or extensions noted in this edition include:

- New part-like pages
- Improved control over higher level ToC entries
- New macros for typesetting the titles of poems
- New macros for making and typesetting glossaries
- Minor extensions for sidebars, boxed verbatims and verses
- The `\em` command is no longer deprecated and minor extension to `\emph`
- Side captions
- New ‘book’ document division
- Minor extension to numbering verse lines
- Double spacing
- Extra space between paragraphs
- A ‘vertical’ version of the `minipage` environment
- Over a dozen new built-in chapterstyles

The following extensions are more for package writers than general authors:

- New macros for specifying emulated packages
- New macro for extending an existing macro
- Hooks into sectioning, captioning, etc., commands

Acknowledgements

The Acknowledgements list in the User Manual is somewhat out of date. I am very grateful to the following who have improved memoir by noting or fixing errors, or providing ideas, suggestions or code: Paul Abrahams, William Adams, Tim Arnold, Donald Arseneau, Stephan von Bechtolsheim, Jens Berger, Karl Berry, Javier Bezos, Stefano Bianchi, Sven Bovin, Ignasi Furió Caldenty, Ezequiel Martín Camara, David Carlisle, Gustavo Cevolani, Jean-Côme Charpentier, Michael A. Cleverly, Steven Douglas Cochran, Frederic Connes, Žarko F. Čučej, Christopher Culver, Michael W. Daniels, Michael Downes, Christopher Dutchyn, Thomas Dye, Victor Eijkhout, Danie Els, Robin Fairbairns, Simon Fear, Kai von Fintel, Ivars Finvers, Ulrike Fischer, Matthew Ford, Musa Furber, Daniel Richard G., Ignacio Fernández Galván, Gerardo Garcia, Romano Giannetti, Donald Goodman, Gabriel Guernik, Matthias Haldiman, Kathryn Hargreaves, Sven Hartrumpf, hazydirk, Carsten Heinz, Florence Henry, Peter Heslin, Lars Hoemke, Urs Hofer, Morten Høgholm, Hendrik Holm, Vladimir Ivanovic, Martin Jørgensen, Stefan Kahrs, Marcus Kohm, Flavian Lambert, Jørgen Larsen, Kevin Lin, Matthew Lovell, Daniel Luecking, Anders Lyhne, Lars Madsen, Vittorio De Martino, Ben McKay, Frank Mittelbach, Vilar Camara Neto, Rolf Niepraschk, Patrik Nyman, Heiko Oberdiek, Scott Pakin, Adriano Pascoletti, Paul, Troels Pedersen, Steve Peter, Erik Quaeghebeur, Aaron Rendahl, Chris Rowley, Bernd Raichle, René, Robert Schlicht, Dirk Schlimm, Arnaud Schmittbuhl, Rainer Schöpf, Paul Stanley, Per Starbäck, James Szinger, Jens Taprogge, Scott Thatcher, Reuben Thomas, Bastiaan Niels Veelo, Guy Verville, Emanuele Vicentini, Jörg Vogt, Jürgen Vollmer, M J Williams, and David Wilson. If I have inadvertently left anyone out please let me know¹ and I will make the correction.

Along those lines, if you have any questions please direct them to the `comp.text.tex` newsgroup instead of directly to me as you are much more likely to get a satisfactory and timely response.

¹I am currently occasionally reachable via email at `herries dot press at earthlink dot net`.

One

Corrections and omissions

1.1 Pagination

In section 1.2 of the manual I say that pagination usually starts with the Table of Contents page. This is wrong! *All* pages take part in the pagination, including the Half-title and Title pages. It is the folios (i.e., the printed page numbers) that usually start on the Table of Contents page.

Originally the `titlingpage` environment reset the page number to one when it finished. It now does not reset the page number.

1.2 Folding paper

In section 2.1 of the manual I say that you cannot fold a piece of paper more than six times. This is incorrect. A high school student, Britney Gallivan, has managed to fold a sheet of paper in half twelve times (see, for example, <http://mathworld.wolfram.com/Folding.html>).

1.3 Part headings

The manual claims that `\midpartskip` is a length; it is not, it is a macro and cannot be altered by a `\setlength`.

`\beforepartskip \midpartskip \afterpartskip`

The definitions of these three macros, which control the vertical spaces in a `\part` heading, are

```
\newcommand*{\beforepartskip}{\null\vfil}
\newcommand{\midpartskip}{\par\vskip 20pt}
\newcommand*{\afterpartskip}{\vfil\newpage}
```

1.4 Appendices

`\ifanappendix`

When memoir is processing an appendix `\ifanappendix` is set TRUE. otherwise it is FALSE.

1.5 Writing out verbatim

The class provides two methods for writing out verbatim material to a file. Unfortunately only one was described in the manual. Here are the two methods.

```
\begin{verbatimoutput}{\file} material \end{verbatimoutput}
\begin{writeverbatim}{\stream} material \end{writeverbatim}
```

The material in these environments is written out verbatim. Material from the `verbatimoutput` environment is written to the `\file` file. On the other hand, material from the `writeverbatim` environment is written to whatever file is currently associated with the `\stream` output stream.

1.6 Subcaptions

```
\subcaptionref{\key}
\subcaptionref*{\key}
\subcaptionlabelfont{\fontspec}
```

To refer to a subcaption you can use either `\subcaptionref` or the starred version `\subcaptionref*`. In the latter case the normal font is used and in the former the reference is typeset using the `\subcaptionlabelfont`.

1.7 New list entries

In section 10.4 *New list of... and entries* of the manual I gave an example of creating a new list entry for a ‘subanswer’ as:

```
\newlistentry[answer]{subanswer}{1}
```

Unfortunately `\newlistentry` takes one optional and three required arguments.

```
\newlistentry[\within]{\cntr}{\ext}{\level-1}
```

The example should have read:

```
\newlistentry[answer]{subanswer}{ans}{1}
```

1.8 Footnotes and ragged bottom

The manual claims that after the `\feetbelowfloat` declaration footnotes would be placed at the bottom of the page when `\raggedbottom` was in effect. This is not so.

```
\setfootnoterule[\fill]{\space}{\width}{\thickness}
```

The macro `\setfootnoterule` can be used to specify the appearance of the rule before footnotes, where `\space` is extra space between the footnote text and the rule has `\width` and `\thickness`. The default is:

```
\setfootnoterule{3pt}{0.4\columnwidth}{\normalrulethickness}
```

The optional *<fill>* argument is inserted just before the rule is drawn. To ensure that footnotes are at the bottom `\raggedbottom` pages you can use this:

```
\setfootnoterule[\vfill]{3pt}{0.4\columnwidth}{\normalrulethickness}
```

1.9 Package clashes

On occasions a package does not work with memoir because the class has already defined a macro that the package wants to define. There are ways to cope with this, depending on what you want to do [Wil04]. For the sake of argument, assume that both the memoir class and the pack package have both defined the macro `\amacro`, the package by using `\newcommand`. If pack is used with memoir then there will be a report that `\amacro` has already been defined.

1. Discard memoir's definition:

```
\documentclass[...]{memoir}
\let\amacro\undefined% or \relax 'undefine' memoir's definition
\usepackage{pack}
```

and pack's version of `\amacro` is used from now on.

2. Discard pack's definition:

```
\documentclass[...]{memoir}
\let\memamacro\amacro% save memoir's definition
\let\amacro\undefined
\usepackage{pack}
\let\amacro\memamacro% restore memoir's definition
```

and memoir's version of `\amacro` is used from now on.

3. Keep both definitions:

```
\documentclass[...]{memoir}
\let\memamacro\amacro% save memoir's definition
\let\amacro\undefined
\usepackage{pack}
```

and after this use `\memamacro` when you need memoir's version and `\amacro` when you want to use pack's definition. But this solution doesn't always work as you might not know when the particular versions must be used, or it is impossible to partition the uses. A last resort is to ask the authors that one or the other macro names be changed, however, for good reasons, neither may be willing to do this.

I was spurred to write the above following the thread *Typesetting algorithms in memoir* started by Filip Militic on CTT (2006/12/12) where he had problems because both the alg and algorithm packages use the float package which defines `\newfloat` which is also defined by memoir. There was a response by Danie Els who said that the algorithm package actually consisted of two packages — `algorithmic` and `algorithm` and it is the latter one that uses the float package. In this particular case Danie suggested ignoring the algorithm package and using memoir's methods, and he gave the example below.

```
\documentclass[...]{memoir}
\usepackage{algorithmic}
% simple new memoir float
\newcommand*{\algorithmname}{Algorithm}
\newcommand*{\listalgorithmname}{List of Algorithms}
```

```

\newlistof{listofalgorithms}{loa}{\listalgorithmname}
\newfloat{algorithm}{loa}{\algorithmname}
\newfixedcaption{\falgcaption}{algorithm}
\newlistentry{algorithm}{loa}{0}
...
\begin{document}
\listofalgorithms
...
\begin{algorithm}
\caption{An algorithm}\label{alg1}
\begin{algorithmic} ... \end{algorithmic}
\end{algorithm}
%% a non-float algorithm
\begin{minipage}{.9\textwidth}
\falgcaption{Another}\label{...}
\begin{algorithmic}...\end{algorithmic}
\end{minipage}

```

An alternative solution, if you want both memoir's and float's methods is a variant on method 1 above.

```

\documentclass[...]{memoir}
%%% create new memoir floats
\let\newfloat\undefined% or \let\newfloat\relax
\usepackage{algorithmic}
\usepackage{algorithm}
%%% create new algorithm (float) floats
...

```

FLOAT PACKAGE

The class now (November 2007) automatically sets

```
\let\newfloat\relax
```

if the float package is used, either directly or indirectly by being used by a package that you use (like alg).

CAPTION PACKAGE

Although memoir provides a range of methods for specifying the layout of captions, there are those who prefer to use the caption package. Now (November 2007) you can use the caption package with the class and use its facilities for caption styling instead. If you do this then you may have surprises if you use any of memoir's captioning methods as they will not necessarily work as advertised.

1.10 Bibliography and Index marks

<code>\bibmark \indexmark</code>

`\bibmark` and `\indexmark` may be used in pagestyles for page headers in a Bibliography or an Index. Their default definitions are:

```
\newcommand*\bibmark{}
```

```
\newcommand*\indexmark{}
```

but can be redefined to note the Bibliography or Index, like:

```
\renewcommand*\bibmark{\markboth{\bibname}{}}
```

```
\renewcommand*\indexmark{\markboth{\indexname}{\indexname}}
```


Two

Page layout

2.1 Text height

After specifying the page layout you want, the `\checkandfixthelayout` command has to be called to implement your specification.

```
\checkandfixthelayout[⟨algorithm⟩]
\checkthelayout[⟨algorithm⟩]
```

The `\checkandfixthelayout[⟨algorithm⟩]` macro uses `\checkthelayout[⟨algorithm⟩]` to check the page layout specification you have given, and then implements it. The `\checkthelayout[⟨algorithm⟩]` macro checks the layout, modifying the `\textheight` according to `⟨algorithm⟩`, but does not implement the layout.

Following a suggestion by Morten Høgholm, if you use the `calc` package you can now use constructs like the following in a page layout specification:

```
\setlength{\textheight}{41\baselineskip + \topskip}
\settypeblocksize{41\baselineskip + \topskip}{33pc}{*}
```

When using `\flushbottom` LaTeX expects that the `\textheight` is such that an integral number of text lines in the body font will fit exactly into the height. If not, then it issues ‘underfull vbox’ messages. More precisely, if b is the `\baselineskip` and t is the `\topskip`, N is an integer (the number of lines in the textblock), and T is the `\textheight` then to avoid underfull vboxes the following relationship must hold

$$T = (N - 1)b + t \tag{2.1}$$

By default `\checkthelayout` ensures that the final `\textheight` meets this criterion. The optional `⟨algorithm⟩` argument lets you control just how it does this. In the following H is your requested value for the `\textheight` and the other symbols are as before, with T as the adjusted value, and using integer arithmetic.¹ The permissible values for `⟨algorithm⟩` are:

fixed The `\textheight` is not altered.

$$T = H \tag{2.2}$$

If you use this option you may find that underfull vboxes are reported for `\flushbottom` pages.

¹In this context ‘integer arithmetic’ means that the result of a division will be rounded down. For example 99/10 in ‘real arithmetic’ results in 9.9, whereas with integer arithmetic the result is 9, not 10.

Table 2.1: Results from sample `\textheight` adjustments

Requested height	Algorithm			
	fixed	classic	lines	nearest
	adjusted height in pts, (lines)			
10.0\baselineskip	120.0pt, (10)	130pt, (11)	118pt, (10)	118pt, (10)
10.2\baselineskip	122.4pt, (10)	130pt, (11)	118pt, (10)	118pt, (10)
10.4\baselineskip	124.8pt, (10)	130pt, (11)	118pt, (10)	130pt, (11)
10.6\baselineskip	127.2pt, (10)	130pt, (11)	118pt, (10)	130pt, (11)
10.8\baselineskip	129.6pt, (10)	130pt, (11)	118pt, (10)	130pt, (11)
11.0\baselineskip	132.0pt, (11)	142pt, (12)	130pt, (11)	130pt, (11)

`classic` This is the default and is the one used by the standard classes.

$$T = b\lfloor H/b \rfloor + t \quad (2.3)$$

The relationship (2.1) is maintained.

`lines` This is similar to `classic`, but results in a smaller final value.

$$T = b\lfloor (H - b)/b \rfloor + t \quad (2.4)$$

The relationship (2.1) is maintained.

`nearest` The calculated value is the nearest to the given value while still maintaining the relationship (2.1).

$$T = b\lfloor (H - t + b/2)/b \rfloor + t \quad (2.5)$$

Table 2.1 shows the results from the various `\textheight` adjustment calculations² where the `\baselineskip` is 12pt and the `\topskip` is 10pt, which are the normal values for a Computer Modern 10pt font. In all cases the `fixed` algorithm resulted in underfull vboxes. If you know the number of lines that you want, say 42, then requesting

```
% setting equivalent to \setlength{\textheight}{42\baselineskip}
\checkandfixthelayout[lines]
```

will result in the most appropriate `\textheight`.

2.2 Side margins

In twoside printing the spine margin is normally the same on both recto and verso pages and, unless the spine and foreedge margins are the same, the textblock is shifted side to side when printing the recto and verso pages. Additionally you can have different headers and footers for the recto and verso pages. In oneside printing the textblock is not moved and the headers and footers are the same for both odd and even pages.

Some documents are designed to have, say, a very wide righthand margin in which to put illustrations; this leads to needing the spine margin on verso pages to be much larger than the spine margin on recto pages. This can be done with the `oneside` option. However,

²For comparison the optimum heights from equation 2.1 for 10, 11 and 12 lines are respectively 118pt, 130pt and 142pt.

different headers and footers are required for the recto and verso pages, which can only be done with the twoside option. The way to get the desired effects is like this (twoside is the default class option):

```
\documentclass{memoir}
%%% set up the recto page layout
\checkandfixthelayout%      or perhaps \checkandfixthelayout[lines]
\setlength{\evensidemargin}{\oddsidemargin}% after \checkandfix...
...
```

2.3 Overfull lines

TeX tries very hard to keep text lines justified while keeping the interword spacing as constant as possible, but sometimes fails complaining about an overfull hbox.

```
\fussy \sloppy
\begin{sloppypar} ... \end{sloppypar}
\midsloppy
\begin{midsloppypar} ... \end{midsloppypar}
```

The default mode for LaTeX typesetting is `\fussy` where the (variation of) interword spacing in justified text is kept to a minimum. Following the `\sloppy` declaration there may be a much looser setting of justified text. The `sloppypar` environment is equivalent to:

```
{\par \sloppy ... \par}
```

Additionally the class provides the `\midsloppy` declaration (and the `midsloppypar` environment) which allows a setting somewhere between `\fussy` and `\sloppy`. Using `\midsloppy` you will get fewer overfull lines compared with `\fussy` and fewer obvious large interword spaces than with `\sloppy`. I have used `\midsloppy` for this manual; it hasn't prevented overfull lines or noticeably different interword spaces, but has markedly reduced them compared with `\fussy` and `\sloppy` respectively.

2.4 Sloppybottom

TeX does its best to avoid widow and orphan lines — a widow is where the last line of a paragraph end up at the top of a page, and an orphan³ is when the first line of a paragraph is at the bottom of a page. Here is one person's view on the matter:

...in experimenting with `raggedbottom`, `widowpenalty`, and `clubpenalty`, I think that I have not found a solution that strikes me as particularly desirable. I think what I would really like is that widows (i.e., left-over single lines that begin on the following page) are resolved not by pushing one extra line from the same paragraph also onto the next page, but by stretching the `textheight` to allow this one extra at the bottom of the same page.
/iaw (from CTT, *widow handling?*, May 2006)

As so often happens, Donald Arseneau came up with a solution.

³Knuth uses the term 'club' instead of the normal typographers' terminology.

`\sloppybottom`

The declaration `\sloppybottom` lets TeX put an extra line at the bottom of a page to avoid a widow on the following page.

The `\topskip` must have been increased beforehand for this to work (a 60% increase is reasonable) and this will push the text lower on the page. Run `\checkandfixthelayout` after the change (which may reduce the number of lines per page). For example, in the preamble:

```
\setlength{\topskip}{1.6\topskip}
\checkandfixthelayout
\sloppybottom
```

The following is the generally suggested method of eliminating widows and orphans, but it may well result in some odd looking pages, especially if `\raggedbottom` is not used.

```
\clubpenalty=10000
\widowpenalty=10000
\raggedbottom
```

The late Michael Downes provided the following (from CTT *widow/orphan control package* (for 2e)?, 1998/08/31):

For what it's worth here are the penalty values that I use when I don't [want] to *absolutely* prohibit widow/orphan break, but come about as close as TeX permits otherwise. This is copied straight out of some code that I had lying around. I guess I could wrap it into package form and post it to CTAN.

Michael Downes

```
% set \clubpenalty, etc. to distinctive values for use
% in tracing page breaks. These values are chosen so that
% no single penalty will absolutely prohibit a page break, but
% certain combinations of two or more will.
\clubpenalt=9996
\widowpenalty=9999
\brokenpenalty=4991
% Reiterate the default value of \redisplaypenalty, for
% completeness.
% Set postdisplaypenalty to a fairly high value to discourage a
% page break between a display and a widow line at the end of a
% paragraph.
\predisplaypenalty=10000
\postdisplaypenalty=1549
% And then \displaywidowpenalty should be at least as high as
% \postdisplaypenalty, otherwise in a situation where two displays
% are separated by two lines, TeX will prefer to break between the
% two lines, rather than before the first line.
\displaywidowpenalty=1602
```

You can use `\enlargethispage` to add or subtract to the text height on a particular page to move a line forwards or backwards between two pages.

As you can see, perfect automatic widow/orphan control is problematic. If all else fails, the solution is either to live with the odd line or to reword the text.

2.5 Extra inter-paragraph space

Some like, and some are forced, to put extra space between paragraphs; often also eliminating any indentation at the start of a paragraph. This can cause problems for the reader, the most egregious being when one paragraph ends at the bottom of the page with a full line and the next one starts at the top of the following page. How is the reader expected to know that two paragraphs are involved?

```
\abnormalparskip{<length>}
\nonzeroparskip
\traditionalparskip
```

If you have to do a disservice to your readers you can use the `\abnormalparskip` declaration to set the inter-paragraph spacing (the length `\parskip`) to `<length>`. If you use the `\nonzeroparskip` declaration then `\parskip` will be given a reasonable value.⁴ If you simply say, for example

```
\setlength{\parskip}{2\baselineskip}
```

then you are likely to find many things changed that you might not have expected. The declarations provided here try and shield you from the worst of these, but with no guarantees.

If you want to change the indentation at the start of any paragraphs you have to set `\parindent` yourself.

Following the `\traditionalparskip` declaration the `\parskip` will be restored to its traditional value and all should be well with the world.

I based the code for this functionality upon the NTG classes [LEB04] which indicated some of the pitfalls involved in increasing the spacing. The difficulty with writing a package for this is that `\par`, and hence `\parskip`, occurs in many places, some unexpected and others deeply buried in the code for any of the classes.

2.6 Double spacing

Some of those that have control over the visual appearance of academic theses like them to be ‘double spaced’. This, of course, will make the work harder to read⁵ but perhaps that is the purpose, or maybe they have stock (shares) in papermills and lumber companies.

The following is heavily based on the `setspace` package [Tob00], but the names have been changed to avoid any clashes. Like the `nonzero \parskip`, the `\baselineskip` rears its head in many places, and again it is hard for a package to get at the internals of the overlying class and kernel code. This is not to say that all is well with trying to deal with it at the class level.

```
\OnehalfSpacing \DoubleSpacing
```

⁴Except that all values except zero are unreasonable.

⁵I certainly found them so when I was having to read them before examining the candidates for their degrees. The writers of the regulations, which were invariably single spaced, seemed to be immune to any suggestions.

2. PAGE LAYOUT

The declaration `\OnehalfSpacing` increases the spacing between lines so that they appear to be double spaced (especially to the thesis layout arbiters), while the declaration `\DoubleSpacing` really doubles the spacing between lines which really looks bad; but if you have to use it, it is there. The spacing in footnotes and floats (e.g., captions) is unaltered, which is usually required once the controllers see what a blanket double spacing brings.

```
\SingleSpacing \SetSingleSpace{<factor>}
```

The `\SetSingleSpace` command is meant to be used to adjust *slightly* the normal spacing between lines, perhaps because the font being used looks too cramped or loose. The effect is that the normal `\baselineskip` spacing will be multiplied by `<factor>`, which should be close to 1.0. The declaration `\SingleSpacing` returns everything to normal, or at least the setting from `\SetSingleSpace` if it has been used.

```
\begin{SingleSpace} ... \end{SingleSpace}
\begin{Spacing}{<factor>} ... \end{Spacing}
\begin{OnehalfSpace} ... \end{OnehalfSpace}
\begin{DoubleSpace} ... \end{DoubleSpace}
```

These are the environments corresponding to the declarations presented earlier, for when you want to change the spacing locally.

```
\setDisplayskipStretch{<fraction>}
\memdskipstretch
\noDisplayskipStretch
\memdskips
```

If you have increased the interlinear space in the text you may wish, or be required, to increase it around displays (of maths). The declaration `\setDisplayskipStretch` will increase the before and after `displayskip`s by `<fraction>`, which must be at least 0.0. More precisely, it defines `\memdskipstretch` to be `<fraction>`. The `\noDisplayskipStretch` declaration sets the skips back to their normal values. It is equivalent to

```
\setDisplayskipStretch{0.0}
```

The skips are changed within the macro `\memdskips` which, in turn, is called by `\everydisplay`. If you find odd spacing around displays then redefine `\memdskips` to do nothing. Its original specification is:

```
\newcommand*{\memdskips}{%
  \advance\abovedisplayskip \memdskipstretch\abovedisplayskip
  \advance\belowdisplayskip \memdskipstretch\belowdisplayskip
  \advance\abovedisplayshortskip \memdskipstretch\abovedisplayshortskip
  \advance\belowdisplayshortskip \memdskipstretch\belowdisplayshortskip}
```

If you need to use a `minipage` as a stand-alone item in a widely spaced text then you may need to use the `vminipage` environment instead to get the before and after spacing correct.

2.7 Page styles

By default the *headings* pagestyle automatically uppercases the titles.

<code>\nouppercaseheads \uppercaseheads</code>
--

Following the declaration `\nouppercaseheads` the titles in the *headings* pagestyle will not be automatically uppercased. The default is `\uppercaseheads`, which specifies that the titles are to be automatically uppercased.

Document divisions

Unlike the other chapters which use the *demo3* chapterstyle, this one uses the *pedersen* chapterstyle.

3.1 Book headings

Frederic Connes has told me that in French typography there is often a document division above the `\part` level. This is also sometimes the case with English typography — the *Chicago Manual of Style* [CMS93, p21] shows an example. Based on code that he kindly sent me, a new document division, Book, is provided that is above Part in the division hierarchy. There are now six levels of document division and these are given in Table 3.1.

```
\book[<toc-title>]{<title>}
\book*{<title>}
```

The `\book` command is like the `\part` command and produces a similar looking title page in the document.

```
\bookmark{<title>}
```

The `\book` code includes `\bookmark{<title>}` for storing the title of the book if it is going to be used, for example, in page headers. Its default definition is simply:
`\newcommand*{\bookmark}[1]{}`

```
\bookblankpage \nobookblankpage
```

A page with a `\book` title is normally followed by a blank page. If you do not want this then use the `\nobookblankpage` declaration. The `\bookblankpage` declaration reverts the behaviour to the normal blank page.

The pagestyle *book* is applied to a book division title page and the pagestyle *afterbook*, which defaults to *empty*, is applied to the blank page, if any, following a `\book` page.

Table 3.1: Division levels

Division	Level
<code>\book</code>	-2
<code>\part</code>	-1
<code>\chapter</code>	0
<code>\section</code>	1
<code>\subsection</code>	2
<code>\subsubsection</code>	3
<code>\paragraph</code>	4
<code>\subparagraph</code>	5

3. DOCUMENT DIVISIONS

BOOK HEADING LAYOUT

The layout for a `\book` page is very similar to that for a `\part` page, although there are separate controls for each.

The code for typesetting the page is in essence like this.

```
\newcommand{\book}[1]{%
  \cleardoublepage
  \thispagestyle{book}%
  \beforebookskip
  \printbookname\booknamenum{\booknumfont\thebook}%
  \midbookskip
  \printparttitle{#1}%
  \bookmark{#1}%
  \afterpartskip}
```

```
\beforebookskip \midbookskip \afterbookskip
```

These commands are called before any part of the title is set, between typesetting the number (if any) and the title, and after the title has been set.

```
\bookname
\printbookname \booknamefont \booknamenum
```

`\bookname`, defined as `\newcommand*{\bookname}{Book}` is the name for a book. `\printbookname`, prints the `\bookname` using the `\booknamefont`, which is defined as:
`\newcommand*{\booknamefont}{\normalfont\huge\bfseries}`
This is followed by `\booknamenum`, which is defined to be `\space`.

```
\booknumfont \printbooknum
```

`\printbooknum` prints the book number (i.e., `\thebook`) using the `\booknumfont`, whose default definition is the same as `\booknamefont`.

```
\booktitlefont \printbooktitle{<title>}
```

`\printbooktitle{<title>}` prints the book title using the `\booktitlefont`, which is defined as:
`\newcommand*{\booktitlefont}{\normalfont\Huge\bfseries}`

3.2 Part headings

```
\partmark{<title>}
```

The `\part` code now includes `\partmark{<title>}` for storing the title of the part if it is going to be used, for example, in page headers. Its default definition is simply:
`\newcommand*{\partmark}[1]{}`

`\partblankpage \nopartblankpage`

A page with a `\part` title is normally followed by a blank page. If you do not want this then use the `\nopartblankpage` declaration. The `\partblankpage` declaration reverts the behaviour to the normal blank page.

A new `pagestyle` *afterpart*, which defaults to *empty*, is applied to the blank page, if any, following a `\part` page.

`\newleadpage[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}`
`\newleadpage*[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}`
`\renewleadpage[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}`
`\renewleadpage*[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}`

`\newleadpage` and associates are variants of the `\newcommand` and companions; the original suggestion and code was from Danie Els. The `\newleadpage` macro defines a macro `\cmdname` that when called typesets an Appendixpage-like page with a title `⟨title⟩` using the `⟨page-style⟩` for the page. The default `⟨page-style⟩` is *empty*. The macro `\renewleadpage` redefines an existing leadpage command.

For example,

```
\newleadpage{plates}{Picture Gallery}
```

creates the new command `\plates` which when called generates an unnumbered part-like page with the title **Picture Gallery**.

`\leadpagetoclevel`

When `\(re)newleadpage` is used the resulting command adds `⟨title⟩` to the ToC as though it was an unnumbered chapter. More precisely it will be added as though it were an unnumbered `\leadpagetoclevel` entry, whose default definition is:

```
\newcommand*{\leadpagetoclevel}{chapter}
```

When the starred versions `\(re)newleadpage*` are used the resulting command will not add `⟨title⟩` to the ToC.

Internally the resulting commands use `\partmark` for storing the `⟨title⟩` for possible later use by you.

3.3 Chapter styles

Lars Madsen has collected a wide variety of chapter styles. These, and the code to produce them, are available at <http://www.imf.au.dk/system/latex/artikler/MemoirChapStyles>.

REPARTICLE

When the `article` option is used the default chapter and section styles are close to, but not identical, the corresponding division headings in the `article` class.

The `reparticle` chapterstyle makes a `\chapter` replicate the appearance of a `\section` in the `article` class.

`\reparticle`

The `\reparticle` command makes chapter and lower level division heads replicate those of the article class. You can use it, for example, like:

```
\ifartopt
  \reparticle
\fi
```

to call it if the article option has been requested.

SOUTHALL

On 2006/01/08 Thomas Dye posted his *southall* chapterstyle on `comp.text.tex` and kindly gave me permission to include it here. It is based on the headings in a Cambridge Press book¹ by Aidan Southall. It produces a simple numbered heading with the title set as a block paragraph, and with a horizontal rule underneath. His original code called for lining figures for the number but I have commented out that bit.

```
% Thomas Dye's southall chapter style
\newlength{\headindent}
\newlength{\rightblock}
\makechapterstyle{southall}{%
  \setlength{\headindent}{36pt}
  \setlength{\rightblock}{\textwidth}
  \addtolength{\rightblock}{-\headindent}
  \setlength{\beforechapskip}{2\baselineskip}
  \setlength{\afterchapskip}{5\baselineskip}
```

¹Which I haven't seen

1 Demonstration of the southall chapter style

The above is a demonstration of the *southall* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.1: The southall chapterstyle

```

\setlength{\midchapskip}{0pt}
\renewcommand{\chapttitlefont}{\huge\rmfamily\raggedright}
\renewcommand{\chapnumfont}{\chapttitlefont}
\renewcommand{\printchaptername}{}
\renewcommand{\chapternamenum}{}
\renewcommand{\afterchapternum}{}
\renewcommand{\printchapternum}{%
  \begin{minipage}[t][\baselineskip][b]{\headindent}
    {\vspace{0pt}\chapnumfont%%\figureversion{lining}
      \thechapter}
  \end{minipage}}
\renewcommand{\printchaptertitle}[1]{%
  \hfill\begin{minipage}[t]{\rightblock}
    {\vspace{0pt}\chapttitlefont ##1\par}\end{minipage}}
\renewcommand{\afterchaptertitle}{%
  \par\vspace{\baselineskip}%
  \hrulefill \par\nobreak\noindent \vskip\afterchapskip}}

```

The resulting style is shown in Figure 3.1.

CHAPPELL

Another style that includes rules is one I have called *chappell*, which is based on the chapter heads in [CB99]. The style can easily form the basis for general heads in non-technical books.

```

\makechapterstyle{chappell}{%
  \setlength{\beforechapskip}{0pt}
  \renewcommand*{\chapnamefont}{\large\centering}
  \renewcommand*{\chapnumfont}{\large}
  \renewcommand*{\printchapternonum}{%
    \vphantom{\printchaptername}%
    \vphantom{\chapnumfont 1}%
    \afterchapternum
    \vskip -\onelineskip}
  \renewcommand*{\chapttitlefont}{\Large\itshape}
  \renewcommand*{\printchaptertitle}[1]{%
    \hrule\vskip\onelineskip \centering\chapttitlefont ##1}}

```

This style is shown in Figure 3.2. It centers the chapter number, draws a rule across the page under it, and below that comes the title, again centered. All the fiddling in the `\printchapternonum` macro is to try and ensure that the rule above the title is at the same height whether or not the chapter is numbered (the ToC being an example of an unnumbered heading).

DEMO2 AND DEMO3

This is the original code for the *demo* chapterstyle.

```

\makechapterstyle{demo}{%
  \renewcommand*{\printchaptername}{\centering}

```

Chapter 2

Demonstration of the chappell chapter style

The above is a demonstration of the *chappell* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.2: The chappell chapterstyle

```
\renewcommand*{\printchapternum}{\chapnumfont \numtoName{\c@chapter}}
\renewcommand*{\chapttitlefont}{\normalfont\Huge\sffamily}
\renewcommand*{\printchapttitle}[1]{%
  \hrule\vskip\onelineskip \raggedleft \chapttitlefont ##1}
\renewcommand*{\afterchapttitle}{%
  {\vskip\onelineskip \hrule\vskip \afterchapskip}
}% end demo
```

This has one serious failing and what I am now thinking is a poor design decision. The failing is that if you have any appendices that use the *demo* chapterstyle then they are numbered instead of being lettered. The poor design is that the position of the title with respect to the top of the page is not the same for numbered and unnumbered chapters. The *demo2* chapterstyle below fixes both of these.

```
\makechapterstyle{demo2}{%
  \renewcommand*{\printchaptername}{\centering}
  \renewcommand*{\printchapternum}{\chapnumfont
    \ifanappendix \thechapter \else \numtoName{\c@chapter}\fi}
  \renewcommand*{\chapttitlefont}{\normalfont\Huge\sffamily}
  \renewcommand*{\printchapttitle}[1]{%
    \hrule\vskip\onelineskip \raggedleft \chapttitlefont ##1}
  \renewcommand*{\afterchapttitle}{%
    \vskip\onelineskip \hrule\vskip \afterchapskip}
  \setlength{\beforechapskip}{3\baselineskip}
  \renewcommand*{\printchapternonum}{%
    \vphantom{\chapnumfont One}
    \afterchapternum%
    \vskip\topskip}
```

```
\setlength{\beforechapskip}{2\onelineskip}
}% end{demo2}
```

You may find it instructive to compare the code for the *demo* and *demo2* chapterstyles.

By chance I inadvertently typed a chapterstyle that was a mixture of the *pedersen* and *demo2* styles. As a result there is now a *demo3* chapterstyle as well, the code for which is shown below.

```
\makechapterstyle{demo3}{%
  \renewcommand*{\printchaptername}{\centering}
  \renewcommand*{\chapnumfont}{\normalfont\HUGE\itshape}
  \renewcommand*{\printchapternum}{\chapnumfont
    \ifanappendix \thechapter \else \numtoName{\c@chapter}\fi}
  \renewcommand*{\chapttitlefont}{\normalfont\Huge\sffamily}
  \renewcommand*{\printchaptertitle}[1]{%
    \hrule\vskip\onelineskip \raggedleft \chapttitlefont ##1}
  \renewcommand*{\afterchaptertitle}{%
    \vskip\onelineskip \hrule\vskip \afterchapskip}
  \setlength{\beforechapskip}{0pt}
  \setlength{\midchapskip}{2\onelineskip}
  \setlength{\afterchapskip}{2\onelineskip}
  \renewcommand*{\printchapternonum}{%
    \vphantom{\chapnumfont One}
    \afterchapternum%
    \vskip\topskip}
}% end{demo3}
```

Starting in November 2002 this document used the *demo* chapterstyle. From July 2006 onwards it used the *demo2* chapterstyle, and then the *demo3* chapterstyle from November 2007.

ADDITIONS TO THE CLASS

Several new chapterstyles, including the above, have been added to the class itself. Some are mine and others are from postings to CTT. I have modified many of the posted ones to cater for things like appendices, multiline titles, and unnumbered chapters which were not considered in the originals.

If you want to try several chapterstyles in one document, request the *default* style before each of the others to ensure that a previous style's changes are not passed on to a following one.

bianchi This style was created by Stefano Bianchi¹ and is a two line centered arrangement with rules above and below the large bold sanserif title line. The chapter number line is in a smaller italic font. An example is in Figure 3.3.

bringhurst The *bringhurst* chapterstyle described in the manual and illustrated in Figure 3.4.

brotherton A very simple style designed by William Adams¹ for the science fiction novel *Star Dragon* by Mike Brotherton. The novel is freely downloadable from Brotherton's web site. The style is the same as the *default* except that the number is spelt out in words.

¹CTT, *New chapter style: chapter vs chapter**, 2003/12/09

¹CTT, *An example of a novel?*, 2006/12/09

Chapter 3

Demonstration of the bianchi chapter style

The above is a demonstration of the *bianchi* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.3: The bianchi chapterstyle

DEMONSTRATION OF THE BRINGHURST CHAPTER STYLE

The above is a demonstration of the *bringhurst* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.4: The bringhurst chapterstyle

Chapter Five

Demonstration of the *brotherton* chapter style

The above is a demonstration of the *brotherton* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.5: The *brotherton* chapterstyle

It is demonstrated in Figure 3.5. In the novel the chapters are actually untitled i.e., via `\chapter{}`.

chappell The *chappell* chapterstyle described earlier.

culver A chapter style I created for Christopher Culver¹ based on the format of ‘ancient’ texts. It is one line, centered, bold and with the number printed as Roman numerals, as shown in Figure 3.6.

He also wanted sections to just start with the number and the text to immediately follow on the same line. That can be accomplished like this:

```
\renewcommand*{\thesection}{\arabic{section}}
\renewcommand*{\section}[1]{%
```

¹CTT, “Biblical” formatting, how?, 2004/03/29

VI Demonstration of the *culver* chapter style

The above is a demonstration of the *culver* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.6: The *culver* chapterstyle

```
\refstepcounter{section}%
\par\noindent
\textbf{\thesection.}%
\space\nolinebreak
```

- dash* A simple two line centered chapterstyle. There is a short dash on either side of the number and a slightly larger version of the regular font is used for both the number and the title. This style is shown in Figure 3.7.
- default* This was already in the class but it has been revised to re-initialize all the settings.
- demo2* The chapterstyle that was used for a time in this document. It is an improvement on the original *demo* chapterstyle.
- demo3* The chapterstyle used in this document. It is a modified version of the *demo2* chapterstyle.
- ell* A raggedleft sanserif chapterstyle. The number line is separated from the title by rules like an 'L' on its side and the number is placed in the margin, as shown in Figure 3.9. I will probably use this in my next book.
- ger* This style was created by Gerardo Garcia¹ and is a two line, raggedleft, large bold style with rules above and below. It is demonstrated in Figure 3.10.
- lyhne* A style created by Anders Lyhne¹ and shown in Figure 3.11 where the raggedleft sanserif title is between two rules, with the name and number above. I modified the original to cater for unnumbered chapters. It requires the *graphicx* package.
- madsen* This was created by Lars Madsen¹ and is shown in Figure 3.12. It is a large sanserif raggedleft style with the number in the margin and a rule between the number and title lines. It requires the *graphicx* package.
- pedersen* This was created by Troels Pedersen¹ and requires the *graphicx* package, and, to get the full effect, the *color* package as well. The title is raggedright in large italics while the number is much larger and placed in the righthand margin (I changed the means of placing the number).

¹CTT, *Fancy Headings, Chapter Headings*, 2002/04/12

¹CTT, *Glossary*, 2006/02/09

¹CTT, *New chapter style: chapter vs chapter**, 2003/12/09

¹CTT, *Chapter style*, 2006/01/31

— 7 —

Demonstration of the dash chapter style

The above is a demonstration of the *dash* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.7: The dash chapterstyle

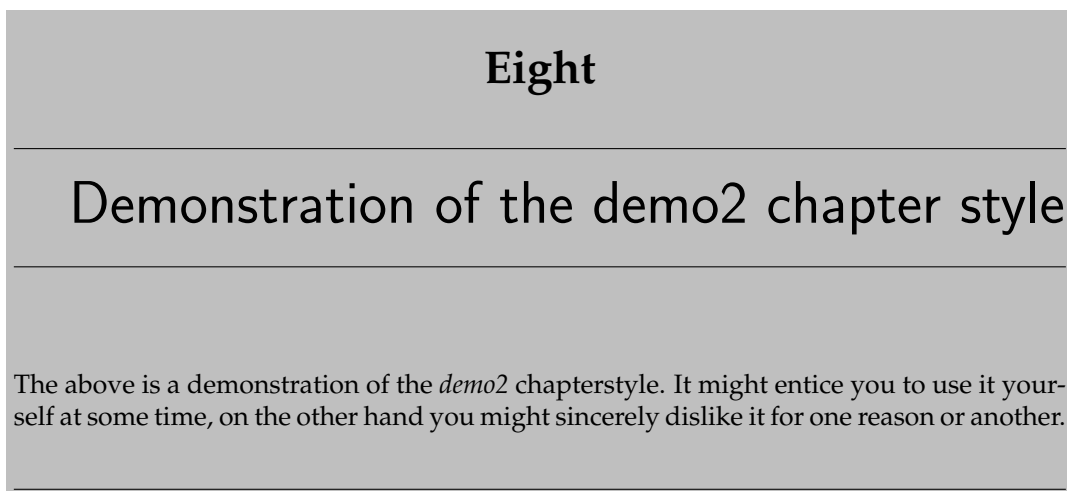


Figure 3.8: The demo2 chapterstyle

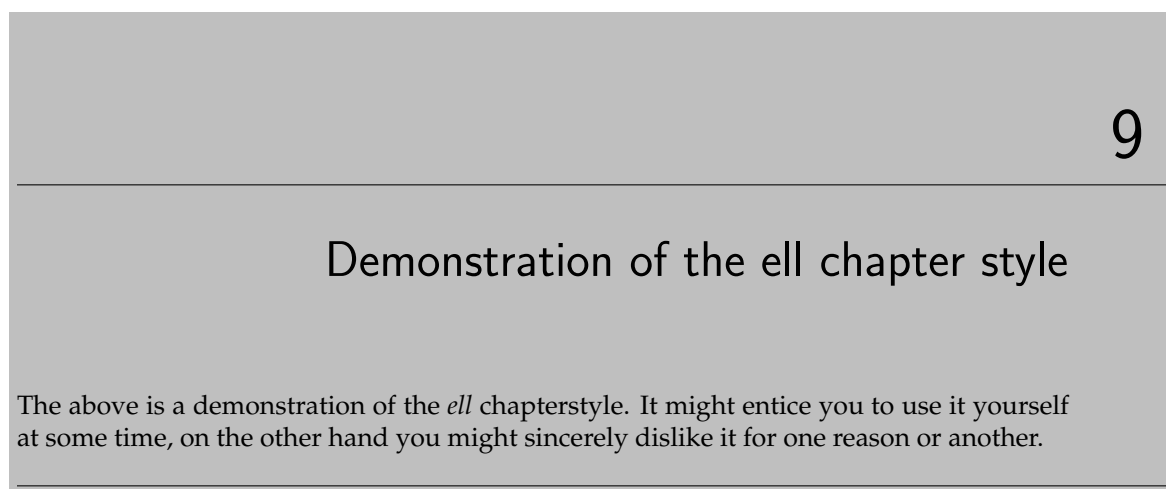


Figure 3.9: The ell chapterstyle

Chapter 10

Demonstration of the *ger* chapter style

The above is a demonstration of the *ger* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.10: The *ger* chapterstyle

CHAPTER 1

Demonstration of the *lyhne* chapter style

The above is a demonstration of the *lyhne* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.11: The *lyhne* chapterstyle

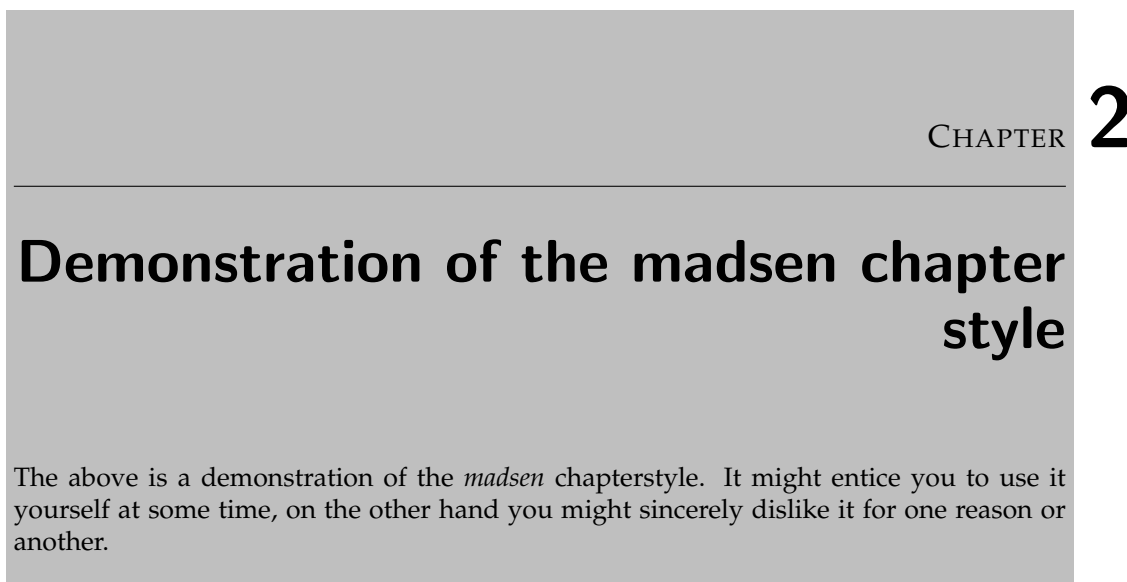


Figure 3.12: The madsen chapterstyle

```
\colorchapnum \colorchaptitle
```

The title is set with `\colorchaptitle` and the number with `\colorchapnum`, both of which default to doing nothing. Lars Madsen has suggested a nice red color for these:

```
\usepackage{color}
\definecolor{ared}{rgb}{.647,.129,.149}
\renewcommand{\colorchapnum}{\color{ared}}
\renewcommand{\colorchaptitle}{\color{ared}}
\chapterstyle{pedersen}
```

southall The *southall* chapterstyle created by Thomas Dye described earlier, except that I have modified it to avoid having to use two new lengths.

thatcher A style created by Scott Thatcher² which has the chapter name and number centered with the title below, also centered, and all set in small caps. There is a short rule between the number line and the title, as shown in Figure 3.13. I have modified the original to cater for multiline titles, unnumbered chapters, and appendices.

veelo The *veelo* style created by Baastain Veelo described in the manual and shown in Figure 3.14 but revised to avoid the use of new lengths. It requires the `graphicx` package.

verville A chapterstyle I created for Guy Verville¹. It is a single line, large centered style with rules above and below, as in Figure 3.15. Unlike my posted version, this one properly caters for unnumbered chapters.

²CTT, *memoir: chapter headings capitalize math symbols*, 2006/01/18

¹CTT, *Headers and special formatting of sections*, 2005/01/18

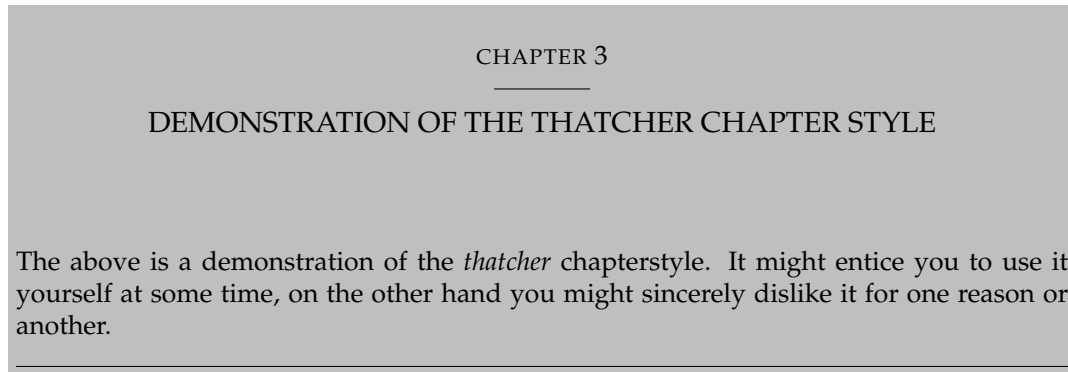


Figure 3.13: The thatcher chapterstyle

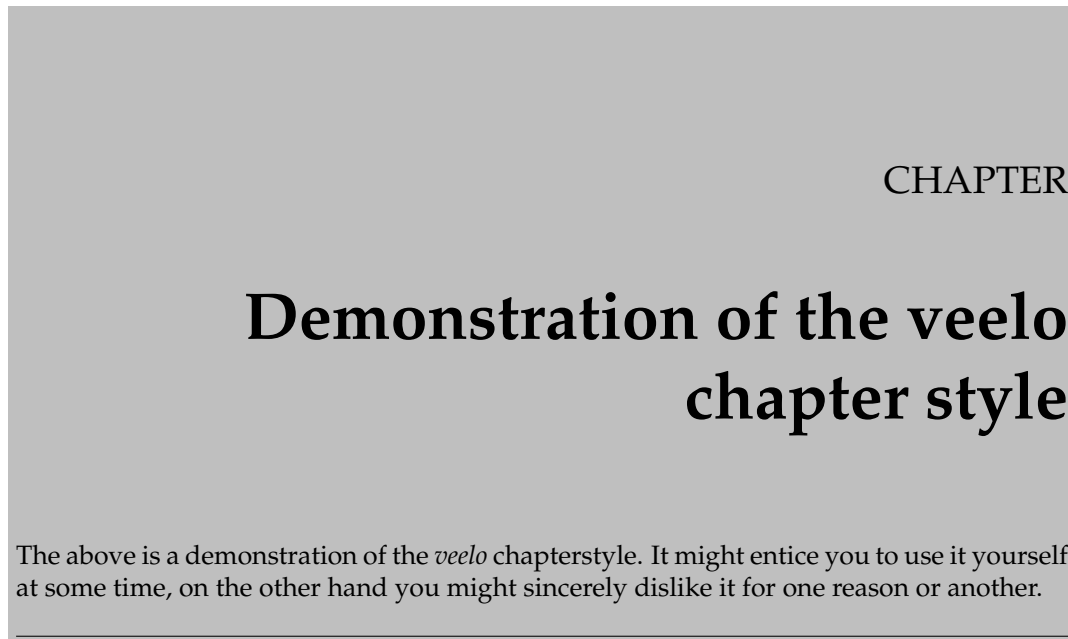


Figure 3.14: The veelo chapterstyle

5. Demonstration of the *verville* chapter style

The above is a demonstration of the *verville* chapterstyle. It might entice you to use it yourself at some time, on the other hand you might sincerely dislike it for one reason or another.

Figure 3.15: The *verville* chapterstyle

3.1 Poem Titles

The new command `\PoemTitle` provides more flexibility in typesetting titles of poems that the original `\poemtitle` does.

```
\PoemTitle[<fortoc>][<forhead>]{<title>}
\NumberPoemTitle
\PlainPoemTitle
\thepoem
\poemtitlemark{<forhead>}
\poemtitlepstyle
```

The `\PoemTitle` command takes the same arguments as the `\chapter` command; it typesets the title for a poem and adds it to the ToC. Following the declaration `\NumberPoemTitle` the title is numbered but there is no numbering after the `\PlainPoemTitle` declaration.

The macro `\poemtitlemark` is called with the argument *<forhead>* so that it may be used to set marks for use in a page header via the normal mark process. The `\poemtitlepstyle` macro, which by default does nothing, is provided as a hook so that, for example, it can be redefined to specify a particular pagestyle that should be used. For example:

```
\renewcommand*{\poemtitlemark}[1]{\markboth{#1}{#1}}
\renewcommand*{\poemtitlepstyle}{%
  \pagestyle{headings}%
  \thispagestyle{empty}}
```

```
\PoemTitle*{<forhead>}{<title>}
\poemtitlestarmark{<forhead>}
\poemtitlestarpstyle
```

3. DOCUMENT DIVISIONS

The `\PoemTitle*` command produces an unnumbered title that is not added to the ToC. Apart from that it operates in the same manner as the unstarred version. The `\poemtitlestarmark` and `\poemtitlestarpstyle` can be redefined to set marks and pagestyles.

MAIN POEM TITLE LAYOUT PARAMETERS

```
\PoemTitleheadstart
\printPoemTitlenonum
\printPoemTitlenum
\afterPoemTitlenum
\printPoemTitletitle{<title>}
\afterPoemTitle
```

The essential of the code used to typeset a numbered *<title>* from a `\PoemTitle` is:

```
\PoemTitleheadstart
\printPoemTitlenum
\afterPoemTitlenum
\printPoemTitletitle{title}
\afterPoemTitle
```

If the title is unnumbered then `\printPoemTitlenonum` is used instead of the `\printPoemTitlenum` and `\afterPoemTitlenum` pair of macros.

The various elements of this can be modified to change the layout. By default the number is centered above the title, which is also typeset centered, and all in a `\large` font.

The elements are detailed in the next section.

DETAILED POEM TITLE LAYOUT PARAMETERS

```
\beforePoemTitleskip
\PoemTitlenumfont
\midPoemTitleskip
\PoemTitlefont
\afterPoemTitleskip
```

As defined, `\PoemTitleheadstart` inserts vertical space before a poem title. The default definition is:

```
\def\PoemTitleheadstart{\vspace{\beforePoemTitleskip}}
\newlength{\beforePoemTitleskip}
\setlength{\beforePoemTitleskip}{1\onelineskip}
```

`\printPoemTitlenum` typesets the number for a poem title. The default definition, below, prints the number centered and in a large font.

```
\def\printPoemTitlenum{\PoemTitlenumfont \thepoem}
\newcommand*{\PoemTitlenumfont}{\normalfont\large\centering}
```

The definition of `\printPoemTitlenonum`, which is used when there is no number, is simply

```
\def\printPoemTitlenonum{}
```


`\afterPoemTitlenum` is called between setting the number and the title. It ends a paragraph (thus making sure any previous `\centering` is used) and then may add some vertical space. The default definition is:

```
\def\afterPoemTitlenum{\par\nobreak\vskip \midPoemTitleskip}
\newlength{\midPoemTitleskip}
\setlength{\midPoemTitleskip}{0pt}
```

The default definition of `\printPoemTitletitle` is below. It typesets the title centered and in a large font.

```
\def\printPoemTitletitle#1{\PoemTitlefont #1}
\newcommand*{\PoemTitlefont}{\normalfont\large\centering}
```

The macro `\afterPoemTitle` finishes off the title typesetting. The default definition is:

```
\def\afterPoemTitle{\par\nobreak\vskip \afterPoemTitleskip}
\newlength{\afterPoemTitleskip}
\setlength{\afterPoemTitleskip}{1\onelineskip}
```

3.2 Miscellaneous

CHAPTER PRECIS

`\prechapterprecisshift`

The length `\prechapterprecisshift` controls the vertical space before a chapter precis. If a precis immediately follows a `\chapter` then different spacing is required depending on whether or not the article option is used. The class sets:

```
\ifartopt
\setlength{\prechapterprecisshift}{0pt}
\else
\setlength{\prechapterprecisshift}{-2\baselineskip}
\fi
```

`\precisfont`

The `\precisfont` is used for typesetting a chapter precis. Its definition is:

```
\newcommand*{\precisfont}{\normalfont\itshape}
```

giving a normal sized italic font.

DIVISION NUMBERING

`\setsecnumdepth{<sec>}`

When used in the body `\setsecnumdepth` sets the `secnumdepth` counter so that only divisions `<sec>` and above will be numbered. In the preamble `\setsecnumdepth` sets both the `secnumdepth` and `maxsecnumdepth` counters.

The class switches off division numbering, for example with the `\frontmatter` declaration, by adjusting the `secnumdepth` counter so that only divisions above the highest (currently `\book`) will be numbered. On the other hand the `\mainmatter` declaration

3. DOCUMENT DIVISIONS

sets `secnumdepth` to the `maxsecnumdepth`, thereby ensuring that (some) divisions will be numbered. Similarly in other cases where the class temporarily switches off numbering by adjusting `secnumdepth` it restores it by setting `secnumdepth` to `maxsecnumdepth`.

Four

Front and rear

4.1 Title page

In the manual I recommended that you did not use `\maketitle` and the associated titling commands for title pages — `\maketitle` and friends do a reasonable job for titles of articles or a quick report but are too inflexible for more prestigious work. In other words, design your own title page and use the general LaTeX commands for vertical and horizontal spacing to lay it out, or perhaps use a `picture` environment.

I have created a collection of example title pages [Wil07] based on books and theses in my library that you might find useful. Vincent Zoonekynd also has a collection of a range of example title pages. These, and the code used to produce them, are available at http://zoonek.free.fr/LaTeX/LaTeX_samples_title/0.html.

4.2 The ToC

There have been requests for a ToC layout along the following lines:

```
PART I Title of part ....
Chapter 1. Title of chapter ...
  1.1 A section ...
...
Appendix A. Title of appendix
  A.1 Another section
...
```

Danie Els suggested that this could be accomplished with a few new commands.¹

<pre>\cftpartname \cftchaptername \cftappendixname</pre>
--

These commands form part of the code for `\part` and `\chapter` entries in the ToC, coming before the relevant number. Their default definitions are empty. To get the above ToC you can do the following:

```
\renewcommand*{\cftpartname}{PART~}
\renewcommand*{\cftchaptername}{\chaptername~}
\renewcommand*{\cftappendixname}{\appendixname~}
```

¹Plus the recoding of some internal macros.

```
\renewcommand*{\cftchapteraftersnum}{.} % dot after number
\setlength{\cftchapternumwidth}{2em} % allow more space
```

Lars Madsen further suggested that the scheme be extended to include names for figures and tables as several academic institutions like each figure or table entry in a LoF or LoT to be redundantly labeled as a figure or table.

```
\cftsectionname \cftsubsectionname \cftsubsubsectionname
\cftparagraphname \cftsubparagraphname
\cftfigurename \cfttablename
```

They are created by the `\newlistentry` macro and by default the `\cft...name` macros have no content.

However, for example, if they required you to put ‘Fig’ before the number of each entry in the LoF, then

```
\renewcommand*{\cftfigurename}{Fig\enspace}
```

could be a suitable response in your preamble.

If you happen to use the `\newsubfloat{<floatenv>}` command, for instance

```
\newsubfloat{figure}
```

to enable subfigures, then there will also be a `\cftsubfloatfigurename` created for you to use if the powers that be really push you.

Another query has been how to get the titles in the ToC to be set raggedright instead of the usual flushright. Assuming that there are more than 100 pages in the document:

```
\setrmarg{3.55em plus 1fil}
```

where the last four characters before the closing brace are: digit 1, lowercase F, lowercase I, and lowercase L.

You may have noticed that there are two ToCs for this document — a short one and a long one. This is how they were produced.

The code below was used to produce the short ToC.

```
%% Short contents and Different ToC style
\renewcommand{\contentsname}{Short contents}
\let\oldchangetocdepth\changetocdepth
\let\oldcftchapterfillnum\cftchapterfillnum
\renewcommand{\changetocdepth}[1]{
\setcounter{tocdepth}{0} % chapters
\renewcommand{\cftchapterfont}{\hfill\sffamily}
\renewcommand{\cftchapterleader}{\textperiodcentered\space}
\renewcommand{\cftchapterafterpnum}{\cftparfillskip}
\setpnumwidth{0em}
\setrmarg{0.3\textwidth}
\tableofcontents
\clearpage
```

The above sets the page numbers as though they were left adjusted in the page number box but with LaTeX reporting overfull hboxes. Changing the width of the box for the page number

```
\setpnumwidth{1.5em}
```

results in the page numbers being right adjusted in the 1.5em wide box, which I think does not look as good. To get the left adjusted effect with no complaints try:

```

\renewcommand*{\cftchapterfillnum}[1]{%
  {\cftchapterleader}\nobreak
  \hbox to 1.5em{\cftchapterpagefont #1\hfil}\cftchapterafterpnum\par}
The next piece of code will typeset a group of subsections in the ToC as a paragraph.
%% have subsections as a paragraph in the ToC
\makeatletter
\let\oldnumberline\numberline
\renewcommand{\cftsubsectionfont}{\itshape}
\renewcommand{\cftsubsectionpagefont}{\itshape}
\renewcommand{\l@section}[2]{\relax
  \def\numberline##1{\textit{##1}}}%
  \leftskip=\cftsubsectionindent
  \rightskip=\@toctrmarg
% \advance\rightskip \z@ plus \hsize % uncomment this for raggedright
% \advance\rightskip \z@ plus 2em % uncomment this for semi-raggedright
  \parfillskip=\fill
  \ifhmode ,\ \else\noindent\fi
  \ignorespaces {\cftsubsectionfont #1}{\cftsubsectionpagefont #2}%
  \let\numberline\oldnumberline\ignorespaces
}
\AtEndDocument{\addtocontents{toc}{\par}}
\makeatother

```

The final piece of code below sets up the rest of the second ToC.

```

%% Default contents
\renewcommand{\contentsname}{Contents}
\let\changetocdepth\oldchangetocdepth
\let\cftchapterfillnum\oldcftchapterfillnum
\renewcommand{\cftchapterfont}{\normalfont\sffamily}
\renewcommand{\cftchapterleader}{\sffamily\cftdotfill{\cftchapterdotsep}}
\renewcommand{\cftchapterafterpnum}{}
\makeatletter
\renewcommand{\cftchapterbreak}{\par\addpenalty{-\@highpenalty}}
\makeatother
\setpnumwidth{2.55em}
\setrmarg{3.55em}
\setcounter{tocdepth}{2}
\tableofcontents

```

Following a remark by Dan Luecking on CTT², version 4.9 of mempatch introduces a new method for specifying the format of the entries' page numbers in the ToC (and LoF, LoT).

²Re: setting page numbers in toc in their natural-width box 2007/08/15

```

\cftpformatpnum{<pnum>} \cftchapterformatpnum{<pnum>}
\cftsectionformatpnum{<pnum>} \cftsubsectionformatpnum{<pnum>}
\cftsubsubsectionformatpnum{<pnum>}
\cftparagraphformatpnum{<pnum>}
\cftsubparagraphformatpnum{<pnum>}
\cftfigureformatpnum{<pnum>} \cftsubfigureformatpnum{<pnum>}
\cfttableformatpnum{<pnum>} \cftsubtableformatpnum{<pnum>}

```

These macros are created by the corresponding `\newlistentry`, which has been modified to do so. The basic definition of all the `\cftXformatpnum` commands is essentially `\newcommand*{\cftXformatpnum}[1]{\hbox to\@pnumwidth{\hfil{\cftXpagefont #1}}}` which sets its argument (the page number) right justified in a box `\@pnumwidth` wide using the `\cftXpagefont` font. To have a `\part`'s page number left justified in its box, for example, do³

```

\renewcommand*{\cftpformatpnum}[1]{%
  \hbox to\@pnumwidth{{\cftpformatpagefont #1}}}

```

Following another suggestion from Lars Madsen you can insert your own (code) hooks into the ToC, LoF, etc.

```

\cftinsertcode{<name>}{<code>}
\cftinserthook{<file>}{<name>}

```

`\cftinserthook` is somewhat like `\addtocontents` in that it enables you to insert a code hook into the ToC, etc., where `<file>` is the (ToC, LoF, ...) file and `<name>` is the 'name' of the hook. The `<code>` for the hook is specified via `\cftinsertcode` where `<name>` is the name you give to the hook. These can be used to make alterations to a 'List of ...' on the fly. For example:

```

\cftinsertcode{A}{%
  \renewcommand*{\cftchapterfont}{\normalfont\scshape}
  ... }% code for ToC

...
\frontmatter
\tableofcontents
\cftinsertcode{G}{...}% code for LoF
\cftinsertcode{F}{...}% hook for LoF
\listoffigures
...
\cftinserthook{lof}{G}
...
\chapter{...}
...
\mainmatter
\cftinserthook{toc}{A}
\cftinserthook{lof}{F}
\chapter{...}

```

³Don't forget to use `\makeatletter ... \makeatother` unless this is in a `sty` file.

...

If you do not use `\cftinsertcode` *before* calling the command to typeset the ‘List of ...’ that it is intended for then nothing will happen. No harm will come if a matching `\cftinserthook` is never used. No harm occurs either if you call `\cftinserthook` and there is no matching `\cftinsertcode`.

BOOK TOC ENTRY

There are the usual kinds of commands for configuring the appearance of `\book` entries in the ToC.

`\cftbookname`

This is called before the book number is set in the ToC. The default definition is empty.

`\cftbeforebookskip \cftbookindent \cftbooknumwidth`

These lengths control the vertical space before a book entry, the indentation of the entry from the left margin, and the space for typesetting the number.

`\cftbookfont \cftbookpagefont \cftbookformatpnum{<pn>}`

These specify the fonts to be used for typesetting the number and title of a book entry in the ToC, and for the page number and its format. More specifically the page number is typeset via

```
\newcommand{\cftbookformatpnum}[1]{%
```

```
\hbox to \@pnumwidth{\hss {\cftbookpagefont #1}}}
```

which puts the page number right justified in a box `\@pnumwidth` wide.

`\cftbookpresnum \cftbookaftersnum \cftbookaftersnumb`

The book number is typeset in a box. `\cftbookpresnum` and `\cftbookaftersnum` are called within the box before and after the number. `\cftbookaftersnumb` is called after the box has been typeset. By default these commands do nothing.

`\cftbookleader \cftbookdotsep`

`\cftbookleader` typesets the leader between a book title and the page number in the ToC. By default this is a dotted leader with `\cftbookdotsep` between the dots which, by default, is set for a book entry to produce no dots.

4.3 The index

The internal indexing code has been changed slightly to make things more efficient. Now any changes to indexed items will be immediately reflected in the `idx` file. Previously it took two LaTeX runs to achieve this.

There is a slight inconvenience if you use the `natbib` package and multiple indexes, or more precisely if you use the optional argument to `\makeindex`. In this case you have to load the package *after* setting up for the indexes as `natbib` redefines `\makeindex` inconsistently with `memoir`'s definition.

```
\documentclass[...]{memoir}
...
\makeindex[one]
...
\usepackage{natbib}
...
```

There is a new `pagestyle` for the first page of an index.

`indextitlepagestyle` This is the same as the `chapter` `pagestyle`.

The `MakeIndex` indexing program can handle a memoir hyperindex, but the `xindy` program cannot, as indicated by the following extract from an email sent to me by Frederic Connes:

```
... You use "|hyperspindexpage(\thepage)", which xindy doesn't
recognize as a valid markup-locref. And I don't see how to add
it, because xindy only accepts one argument in markup-locref
(if the number is not a page number, it will still point to a
page with that number), so replacing it with "|hyperpage" won't
work.
```

```
...It would be nice to be able to deactivate the
"|hyperspindexpage" part, as it causes xindy to crash.
```

I don't use `xindy`, but I have provided something that addresses the problem.

`\memhyperindexfalse`

Putting `\memhyperindexfalse` into the preamble will prevent any hyperindexing no matter what you have instructed the `hyperref` package to do.

Since then Frederic Connes has provided some code for when `xindy` will be used.

`\xindyindex`

Put the `\xindyindex` declaration in the pramble when you will be using `xindy` to process the raw index; there is no need to use `\memhyperindexfalse` as well as this.

4.4 Glossaries

Unlike for indexes, LaTeX provides less than minimal support for glossaries. It provides a `\makeglossary` command for initiating a glossary and a `\glossary` command which

puts its argument, plus the page number, into a `glo` file, and that's it. `memoir`, combined with the `MakeIndex` program [CH88], enables you to generate and print a glossary in your document. The commands for creating a glossary are similar to those for indexes.

```
\makeglossary[⟨file⟩]
```

You have to put `\makeglossary` in your preamble if you want a glossary. This opens a file called by default `\jobname.glo`. If you use the optional `⟨file⟩` argument the file `file.glo` will be opened. A glossary `glo` file is analagous to an index `idx` file.

```
\printglossary[⟨file⟩]
```

To print a glossary call `\printglossary` which will print the glossary from file `\jobname.gls`, or from `file.gls` if the optional argument is used. A glossary `gls` file is analagous to an index `ind` file.

```
\glossary[⟨file⟩](⟨key⟩){⟨term⟩}{⟨desc⟩}
```

Use the `\glossary` command to add a `⟨term⟩` and its description, `⟨desc⟩`, to a glossary file. By default this will be `\jobname.glo` but if the optional `⟨file⟩` argument is given then the information will be written to `file.glo`. The `(⟨key⟩)` argument is optional. If present then `⟨key⟩` will be added to the file to act as a sort key for the `⟨term⟩`, otherwise `⟨term⟩` will be used as the sort key.

By using the optional `⟨file⟩` arguments you can have several glossaries, subject to TeX's limitations on the number of files that can be open at any one time.

A simple glossary entry might be:

```
\glossary{glossary}{A list of terms and their descriptions.}
```

The glossary facilities are designed so that the `MakeIndex` program can be used to convert the raw glossary data in a `glo` file into the printable glossary in a `gls` file.

```
\begin{theglossary} entry list \end{theglossary}
```

Glossary entries are typeset in a `theglossary` environment. It is assumed that a `gls` file will contain a complete `theglossary` environment, from `\begin{theglossary}` all the way through to `\end{theglossary}`.

```
\glossitem{⟨term⟩}{⟨desc⟩}{⟨ref⟩}{⟨num⟩}
```

A `\glossitem` is a glossary entry within a `theglossary` environment for a `⟨term⟩` with `⟨description⟩`. The `⟨num⟩` argument is the page or section where the corresponding `\glossary` was issued. The `⟨ref⟩` argument, if not empty, might be the section or page number corresponding to the `⟨num⟩` page or section number. The default definition is

```
\newcommand{\glossitem}[4]{#1 #2 #3 #4}
```

which is not very exciting. You may well prefer to use your own definition.

4.5 Controlling the glossary

SETTING UP MAKEINDEX

If you just run MakeIndex on a glo file you will get lots of errors; MakeIndex has to be configured to read a glo file and generate a useful gls file as by default it expects to read an index idx file and produce an index ind file. A configuration file like an index ist file will be needed. There is no recommended extension for such a file but I have come to favour gst. The command line for MakeIndex to create a sorted glossary from the raw data in a glo file, say fred.glo, using a configuration file called, say basic.gst, is

```
makeindex -s basic.gst -o fred.gls fred.glo
```

For other jobs just change the file names appropriately.

So, what is in a gst file? The potential contents are given by Chen & Harrison [CH88] and also in the *Companion* [MG⁺04, Chap. 11]. At a minimum you need this:

```
%%% basic.gst basic makindex glossary style file
%%% Output style parameters
preamble "\\begin{theglossary}"
postamble "\\end{theglossary}\\n"
item_0     "\\n\\glossitem"
delim_0    "\\memglonum{"
encap_suffix "}}}"
%%% Input style parameters
keyword "\\glossaryentry"
```

The keyword line says that each entry in an input (glo) file will be of the form:

```
\\glossaryentry{entry text}{number}
```

and by a miracle of coding, this is what memoir will put in a glo file for each \\glossary command.

The preamble and postamble lines tell the program to start and end its output file with \\begin{theglossary} and \\end{theglossary}, respectively. The item_0 tells the program to start each output entry with \\glossitem. The delim_0 says that {\\memglonum{ should be put between the end of the entry text and the (page) number. Finally encap_suffix requests }}} to be put after any 'encapsulated' (page) number.

A complete listing of the possible entries in a configuration file, also called a style file, for MakeIndex is in Table 4.1 and 4.2 with the exception of the output file page number setting keywords.

RAW INPUT DATA

\\@@wrglom@m{<file>}{<key>}{<term>}{<desc>}{<ref>}{<num>}

The \\glossary macro writes its arguments to the aux file in the form of arguments to the \\@@wrglom@m internal macro. In turn this calls a series of other macros that eventually write the data to the <file> glo file in the format (where @ is the actual flag):

```
\\glossaryentry{key@{\\memgloterm{term}} {\\memglodesc{desc}}{\\memgloref{ref}}
|\\memglonumf{num}}
```

which MakeIndex then effectively converts into

```
\\glossitem{\\memgloterm{term}}{\\memglodesc{desc}}{\\memgloref{ref}}
{\\memglonum{\\memglonumf{num}}}
```

Table 4.1: MakeIndex configuration file input parameters

Keyword	Default	Description
keyword (<i>s</i>)	"\\indexentry"	The argument to this command is a MakeIndex index entry
arg_open (<i>c</i>)	'{'	Argument start delimiter
arg_close (<i>c</i>)	'}'	Argument end delimiter
range_open (<i>c</i>)	'('	Start of an explicit page range
range_close (<i>c</i>)	')'	End of an explicit page range
level (<i>c</i>)	'!'	Character denoting a new subitem level
actual (<i>c</i>)	'@'	Character denoting that the following text is to appear in the actual index file
encap (<i>c</i>)	' '	Character denoting that the rest of the argument is to be used as an encapsulating command for the page number
quote (<i>c</i>)	'\"'	Character that escapes the following character
escape (<i>c</i>)	'\\'	Symbol with no special meaning unless followed by the quote character, when both characters will be printed. The quote and escape characters must be different.
page_compositor (<i>s</i>)	"-"	Composite number separator

(s) of type string, (c) of type character

```

\memgloterm{<term>}
\memglodesc{<desc>}
\memgloref{<ref>}
\memglonum{<num>}

```

These macros can be redefined to format the various parts of a glossary entry. Their default definitions are simply

```

\newcommand{\memgloterm}[1]{#1}
\newcommand{\memglodesc}[1]{#1}
\newcommand{\memgloref}[1]{#1}
\newcommand{\memglonum}[1]{#1}

```

For example, if you wanted the term in bold, the description in italics, and no numbers:

```

\renewcommand{\memgloterm}[1]{\textbf{#1}}
\renewcommand{\memglodesc}[1]{\textit{#1}}
\renewcommand{\memglonum}[1]{}

```

There are several macros that effect a glossary entry but which must not be directly modified (the \memglonumf shown above as part of the \glossaryentry is one of these). Each of the following \changeGLOSS... macros takes an optional <file> argument. The changes to the underlying macro apply only to the glossary of that particular <file> (or the \jobname file if the argument is not present).

Table 4.2: MakeIndex configuration file output parameters

Keyword	Default	Description
preamble (<i>s</i>)	"\\begin{theindex}\\n"	Text for the start of the output file
postamble (<i>s</i>)	"\\n\\n\\end{theindex}\\n"	Text at the end of the output file
group_skip (<i>s</i>)	"\\n\\n\\indexspace\\n"	Vertical space before a new letter group
heading_prefix (<i>s</i>)	" "	Prefix for heading for a new letter group
heading_suffix (<i>s</i>)	" "	Suffix for heading for a new letter group
headings_flag (<i>n</i>)	0	A value = 0 inserts nothing between letter groups. A value > 0 includes an uppercase instance of the new symbol, while a value < 0 includes a lowercase instance, all within heading_prefix and heading_suffix
item_0 (<i>s</i>)	"\\n\\item "	Command inserted in front of a level 0 entry
item_1 (<i>s</i>)	"\\n \\subitem "	As above for a level 1 entry
item_2 (<i>s</i>)	"\\n \\subsubitem "	As above for a level 2 entry
item_01 (<i>s</i>)	"\\n \\subitem "	Command inserted in front of a level 1 entry starting at level 0
item_12 (<i>s</i>)	"\\n \\subsubitem "	Command inserted in front of a level 2 entry starting at level 1
item_x1 (<i>s</i>)	"\\n \\subitem "	Command inserted in front of a level 1 entry when the parent level has no page numbers
item_x2 (<i>s</i>)	"\\n \\subitem "	As above for a level 2 entry
delim_0 (<i>s</i>)	", "	Delimiter between level 0 entry and first page number
delim_1 (<i>s</i>)	", "	As above for level 1 entry
delim_2 (<i>s</i>)	", "	As above for level 2 entry
delim_n (<i>s</i>)	", "	Delimiter between page numbers
delim_r (<i>s</i>)	"-"	Designator for a page range
encap_prefix (<i>s</i>)	"\\"	Prefix in front of a page encapsulator
encap_infix (<i>s</i>)	"{"	Infix for a page encapsulator
encap_suffix (<i>s</i>)	"}"	Suffix for a page encapsulator
page_precedence (<i>s</i>)	"rnaRA"	Page number precedence for sorting. r and R are lower- and uppercase roman; a and A are lower- and uppercase alphabetic; n is numeric
line_max (<i>n</i>)	"72"	Maximum length of an output line
indent_space (<i>s</i>)	"\\t\\t"	Indentation commands for wrapped lines
indent_length (<i>n</i>)	"16"	Indentation length for wrapped lines

(*s*) of type string, (*n*) of type number, "\\n" and "\\t" are newline and tab.

```

\changeGLOSSactual[⟨file⟩]{⟨char⟩}
\changeGLOSSref[⟨file⟩]{⟨thecounter⟩}
\changeGLOSSnum[⟨file⟩]{⟨thecounter⟩}
\changeGLOSSnumformat[⟨file⟩]{⟨format⟩}

```

`\changeGLOSSactual` sets `⟨char⟩` as the actual character for the `⟨file⟩` glossary. It is initially `@`. This must match with the actual specified for the `gst` file that will be applied.

`\changeGLOSSref` specifies that `⟨thecounter⟩` should be used to generate the `⟨ref⟩` for the `⟨file⟩` glossary. It is initially nothing.

`\changeGLOSSnum` specifies that `⟨thecounter⟩` should be used to generate the `⟨num⟩` for the `⟨file⟩` glossary. It is initially `\thepage`.

`\changeGLOSSnumformat` specifies that `⟨format⟩` should be used to format the `⟨num⟩` for the `⟨file⟩` glossary. The format of `⟨format⟩` is `|form`, where `|` is the `encap` character specified in the `gst` file, and `form` is a formatting command, taking one argument (the number), without any backslash. For example

```
\changeGLOSSnumformat{|textbf}
```

to get bold numbers. It is initially set as `|memjustarg`, where this is defined as:

```
\newcommand{\memjustarg}[1]{#1}
```

There must be a format defined for the `⟨num⟩` otherwise the arguments to `\glossitem` will not be set correctly.

The `\makeGLOSSary` command uses the `\change...` commands to define the initial versions, so only use the `\change...` macros *after* `\makeGLOSSary`. In this document an early version of the glossary was set up by

```

\makeGLOSSary
\changeGLOSSactual{?}
\makeatletter
\changeGLOSSnum{\@currentlabel}
\makeatother
\changeGLOSSnum{\thepage}

```

The first call of `\changeGLOSSnum` makes the number the current numbered chapter, or numbered section, or numbered I didn't like that when I tried it, so the second call resets the number to the page number.

THE LISTING

The final glossary data in the `gls` file is typeset in the `thegLOSSary` environment, which is much like the `theindex` and `thebibliography` environments.

The environment starts off with a chapter-style unnumbered title. There are several macros for specifying what happens after that.

```

\glossaryname
\glossarymark
\glossaryintoc \noglossaryintoc

```

The title for the glossary is `\glossaryname` whose initial definition is

```
\newcommand*{\glossaryname}{Glossary}
```

`\glossarymark`, which by default does nothing, can be redefined to set marks for headers. The glossary title will be added to the ToC if the `\glossaryintoc` declaration is in force, but will not be added to the ToC following the `\noglossaryintoc`.

`\preglossaryhook`

The macro `\preglossaryhook` is called after the glossary title has been typeset. By default it does nothing, but you could redefine it to, for example, add some explanatory material before the entries start.

`\onecolglossarytrue \onecolglossaryfalse`
`\glossarycolsep \glossaryrule`

The glossary can be typeset in two columns (`\onecolglossaryfalse`) but by default (`\onecolglossarytrue`) it is set in one column. When two columns are used, the length `\glossarycolsep` is the distance between the columns and the length `\glossaryrule` is the width (default 0) of a vertical rule between the columns.

`\begintheglossaryhook`
`\atendtheglossaryhook`

The last thing that `\begin{theglossary}` does is call `\begintheglossaryhook`. Similarly, the first thing that is done at the end of the environment is to call `\atendtheglossaryhook`. By default these macros do nothing but you can redefine them.

For example, if you wanted the glossary in the form of a description list, the following will do that.

```
\renewcommand*{\begintheglossaryhook}{\begin{description}}
\renewcommand*{\atendtheglossaryhook}{\end{description}}
\renewcommand{\glossitem}[4]{\item[#1:] #2 #3 #4}
```

THE GLOSSARY FOR THIS DOCUMENT

The following is the code I have used to produce the glossary in this document.

This is the code that is in the preamble.

```
%%% in the preamble
\makeglossary
\change glossactual{?}
\change glossnum{\thepage}
\change glossnumformat{|hyperpage}%% for hyperlinks
\renewcommand*{\glossaryname}{Command summary}
\renewcommand*{\glossarymark}{\markboth{\glossaryname}{}}

\makeatletter
\renewcommand{\glossitem}[4]{%
  \sbox\@tempboxa{#1 \space #2 #3 #4}%
```

```

\par\hangindent 2em
\ifdim\wd\@tempboxa<0.8\linewidth
  #1 \space #2 #3 \dotfill #4\relax
\else
  #1 \dotfill #4\\
  #2 #3
\fi}
\makeatother

```

The redefinition of `\glossitem` works as follows (it is similar to code used in the setting of a `\caption`):

1. Put the whole entry into a temporary box.
2. Set up a hanging paragraph with 2em indentation after the first line.
3. Check if the length of the entry is less than 80% of the linewidth.
4. For a short entry set the name, description, and any reference then fill the remainder of the line with dots with the number at the right margin.
5. For a longer entry, set the title and number on a line, separated by a line of dots, then set the description (and reference) on the following lines.

The `gst` file I have used for this document has a few more items than the basic one.

```

%%% memman.gst makindex glossary style file for memman and friends
%%% Output style parameters
preamble "\\begin{theglossary}"
postamble "\\end{theglossary}\\n"
group_skip "\\n\\glossaryspace\\n"
item_0 "\\n\\glossitem"
delim_0 "{\\memglonum{"
encap_suffix "}}}"
indent_space "\\t"
indent_length 2
%%% Input style parameters
keyword "\\glossaryentry"
actual '?'
page_compositor "."

```

The `group_skip` line asks that `\glossaryspace` be put between the last entry for one letter and the first for the next letter. The `indent_space` and `indent_length` give a smaller indent for continuation lines in the output than the default.

The `actual` entry says that the input file will use `?` instead of the default `@` as the flag for separating a key from the start of the real entry. The `page_compositor` indicates that any compound numbers will be like 1.2.3 instead of the default 1-2-3.

In the document the raw data is collected by the `\glossary` commands in the body of the text. For instance, although I have not actually used the first two:

```

\glossary(cs)%
  {\cs{cs}\marg{name}}%
  {\Typesets \texttt{name} as a macro name with preceding backslash,
   e.g., \cs{name}.}%
\glossary(gmarg)%
  {\cs{gmarg}\marg{arg}}%
  {\Typesets \texttt{arg} as a required argument, e.g., \marg{arg}.}

```

```
\glossary(glossaryname)%  
  {\cs{glossaryname}}%  
  {Name for a glossary}%  
\glossary(memgloterm)%  
  {\cs{memgloterm}\marg{term}}%  
  {Wrapper round a glossary term.}%
```

Any change to the glossary entries will be reflected in the glo produced from that LaTeX run. MakeIndex has to be run the glo file using the appropriate gst configuration file, and then LaTeX run again to get the corrected, sorted and formatted result printed by \printglossary.

In particular, for this document, which also includes an index so that can be processed when the glossary is processed.

```
pdflatex memmanadd  
makeindex -s memman.gst -o memmanadd.gls memmanadd.glo  
makeindex -s memman.ist memmanadd      %%% for the index  
pdflatex memmanadd
```

4.6 Endnotes

Endnotes are often used instead of footnotes so as not to interrupt the flow of the main text. Although endnotes are normally put at the end of the document, they may instead be put at the end of each chapter.

The endnotes package already uses the command \endnote for an endnote, so the class uses \pagenote for an endnote so as not to clash if you prefer to use the package. The following was originally supplied as the pagenote package.

```
\makepagenote  
\pagenote[⟨id⟩]{⟨text⟩}  
\printpagenotes \printpagenotes*
```

The general principal is that notes are written out to a file which is then input at the place where the notes are to be printed. The note file has an ent extension, like the table of contents file has a toc extension.

You have to put \makepagenote in your preamble if you want endnotes. This will open the ent note file which is called \jobname.ent.

In the body of the text use \pagenote to create an endnote, just as you would use \footnote to create a footnote. In the books that I have checked there are two common methods of identifying an endnote:

1. Like a footnote, put a number in the text at the location of the note and use the same number to identify the note when it finally gets printed.
2. Put no mark in the text, but when it is finally printed use a few words from the text to identify the origin of the note. The page number is often used as well with this method.

The ⟨text⟩ argument of \pagenote is the contents of the note and if the optional ⟨id⟩ argument is not used the result is similar to having used \footnote — a number in the main text and the corresponding number in the endnotes listing (as in 1 above). For the second

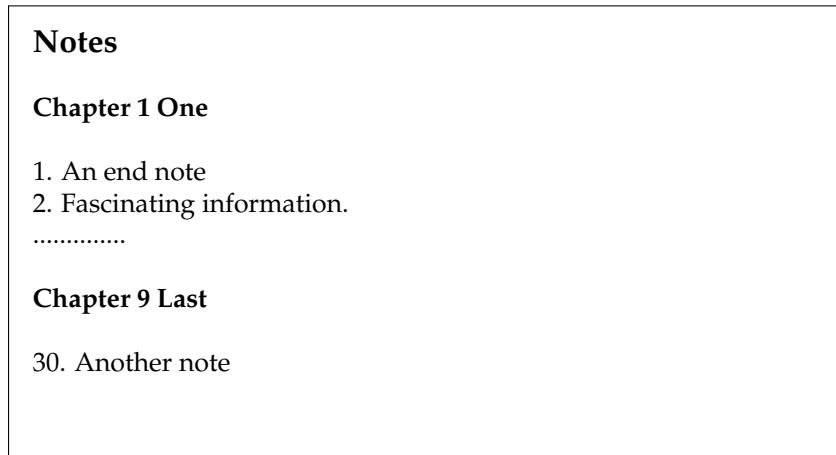


Figure 4.1: Example endnote listing

reference style (2 above) use the optional $\langle id \rangle$ argument for the ‘few words’, and no mark will be put into the main text but $\langle id \rangle$ will be used as the identification in the listing.

For one set of endnotes covering the whole document put `\printpagenotes` where you want them printed, typically before any bibliography or index. The `\printpagenotes` macro inputs the `ent` endnote file for printing and then closes it to any further notes.

For notes at the end of each chapter put `\printpagenotes*`, which inputs the `ent` file for printing then empties it ready for more notes, at the end of each chapter.

The simple use is like this:

```
\documentclass[...]{memoir}
...
\makepagenote
...
\begin{document}
\chapter{One}
... \pagenote{An end note.} ...
... \pagenote{Fascinating information.}
...
\chapter{Last}% chapter 9
... \pagenote{Another note.}% 30th note
...
...
\printpagenotes
...
\end{document}
```

This will result in an endnote listing looking like Figure 4.1.

For notes at the end of each chapter:

```
\documentclass[...]{memoir}
...
```

```
\makepagenote
...
\begin{document}
\chapter{One}
...\pagenote{An end note.} ...
...
\printpagenotes*
\chapter{Last}
...\pagenote{Another note.} ...
...
\printpagenotes*
%%% no more chapters
...
\end{document}
```

<pre>\continuousnotenums \notepageref</pre>

The `\pagenote` counter is used for the notes. By default the endnotes are numbered per chapter. If you want the numbering to be continuous throughout the document use the `\continuousnotenums` declaration. Normally the information on which page a note was created is discarded but will be made available to notes in the endnote listing following the `\notepageref` declaration. These declarations should be put in your preamble.

Because of how TeX writes information to files, when the `\notepageref` declaration is used there must be no notes on the page where `\printnotes` or `\printnotes*` closes the `ent` file. If necessary, a `\clearpage` or similar must be used before the print command.

<pre>\notesname \notedivision</pre>

When `\printnotes` (or `\printnotes*`) is called the first thing it does is call the macro `\notedivision`. By default this is defined as:

```
\newcommand*{\notesname}{Notes}
\newcommand*{\notedivision}{\chapter{\notesname}}
```

In other words, it will print out a heading for the notes that will be read from the `ent` file. `\print...` then closes the `ent` file for writing and after this `\inputs` it to get and process the notes.

CHANGING THE APPEARANCE

<pre>\notenumintext{<num>} \notenuminnotes{<num>}</pre>

The `\pagenote` counter is used for pagenotes. The macro `\notenumintext` is called by `\pagenote` with the value of the `\pagenote` counter as the `<num>` argument to print the value of the `\pagenote` counter in the main text. By default it is printed as a superscript,

but this can be changed, or even eliminated. In the note listing `\notenuminnotes` is used to print the number of a note. The default definitions are:

```
\newcommand*\notenumintext}[1]{\textsuperscript{#1}}
\newcommand*\notenuminnotes}[1]{\normalfont #1. }
```

```
\noteentry{<notenum>}{<id>}{<text>}{<pagenum>}
\prenoteinnotes
\postnoteinnotes
```

The `\pagenote` macro writes `\noteentry`, with the appropriate values for the arguments, to the `ent` file, where `<notenum>` is the note number (from the `\pagenote` counter), `<id>` and `<text>` are as supplied to `\pagenote`, and if the `\notepageref` declaration option is used, `<pagenum>` is the page number, otherwise it is empty. The `\noteentry` macro controls the typesetting of the note.

The default definition of `\noteentry` is

```
\newcommand{\notentry}[4]{%
  \prenoteinnotes
  \noteidinnotes{#1}{#2}\pageinnotes{#4}\noteinnotes{#3}%
  \postnoteinnotes}
```

and the definitions of other macros are:

```
\newcommand{\prenoteinnotes}{\par\noindent}
\newcommand{\postnoteinnotes}{\par}
```

so that (the first paragraph of) each note is printed as a non-indented paragraph.

If you would prefer, say, hanging paragraphs try:

```
\renewcommand{\prenoteinnotes}{\par\noindent\hangindent 2em}
```

```
\noteidinnotes{<notenum>}{<id>}
\idtextinnotes{<id>}
\notenuminnotes{<num>}
```

The `\noteidinnotes` calls `\idtextinnotes` to print the note id if it is given, otherwise it calls `\notenuminnotes` to print the note number. These are defined respectively as:

```
\newcommand*\idtextinnotes[1]{[#1]\space}
\newcommand*\notenuminnotes[1]{\normalfont #1.\space}
```

```
\pageinnotes{<pagenum>}
\printpageinnotes{<pagenum>}
```

The macro `\pageinnotes` controls the printing of a note's page reference. If the `\notepageref` declaration has been used it calls `\printpageinnotes` to do the actual printing. Its definition is:

```
\newcommand*\printpageinnotes[1]{%
  (\pagerefname\ #1)\space}
```

```
\noteinnotes{<text>}
```

The macro `\noteinnotes{<text>}` is simply:

```
\newcommand{\noteinnotes}[1]{#1}
```

and is used to print the text of a note.

```
\addtonotes{<text>}
```

The macro `\addtonotes` inserts `<text>` into the `ent` file. For example, before the first note in a chapter, `\addtonotes` is used to write the `\pagenotesubhead` command to the file.

Note: As the argument to `\pagenote` and `\addtonotes` is moving you may have to `\protect` any fragile commands. If you get strange error messages, try using `\protect` and see if they go away.

```
\pagenotesubhead{<chapapp>}{<num>}{<title>}
\pnchap \pnschap
```

The macro `\pagenotesubhead` typesets the subheadings in an endnote list. It is inserted into the `ent` file via `\addtonotes`. The `<chapapp>` argument is normally `\chaptername` but if the notes are from an appendix then `\appendixname` is used instead. `<num>` is the number of the chapter, or blank if there is no number. Lastly, `<title>` is `\pnchap` for regular chapters which defaults to the ToC entry, or `\pnschap` for starred chapters which defaults to the normal title. The default definition of `\pagenotesubhead` is very simply:

```
\newcommand*{\pagenotesubhead}[3]{%
  \section*{#1 #2 #3}}
```

The scheme is set up under the assumption that notes will only be printed at the end of the document. If you intend to put them at the end of each chapter, then you will probably want to change the definitions of the `\notedivision` and `\pagenotesubhead` macros. For example:

```
\renewcommand*{\notedivision}{\section*{\notesname}}
\renewcommand*{\pagenotesubhead}[3]{}
```

and remember to use `\printnotes*` at each place you want the current set of notes to be printed.

```
\foottopagenote \pagetofootnote
```

You can have both footnotes and endnotes in the same document. However you may start with all footnotes and later decide you would have preferred endnotes instead, or *vice-versa*. The `\foottopagenote` declaration makes `\footnotes` behave as `\pagenotes`, and `\pagetofootnote` has the opposite effect. In either conversion the optional argument will be ignored as for `\pagenote` it can be arbitrary text whereas for `\footnote` it must be a number.

Five

Boxes and environments

5.1 Sidebars

It is now possible to control on which side of the page a sidebar gets placed.

`\sidebarmargin{<margin>}`

For onecolumn documents and with `\sidebaronesidefalse` you can use `\sidebarmargin` to specify which margin you want sidebars to be located. Possible values for *<margin>* are: `left`, `right`, `inner` or `outer` with the obvious meanings. (`\sidebarmargin{right}` and `\sidebaronesidettrue` are equivalent.) There are no positioning options for twocolumn documents.

The results from using `\sidebar` have been much improved due to some hard work by Donald Arseneau.

`\sidebartopsep`

The length `\sidebartopsep` controls the vertical position of the top of a sidebar. The default is 0pt and the top of the sidebar is aligned with the top of the textblock.

`\setsidebarheight{<height>}`

The command `\setsidebarheight` sets the height of the sidebars to *<height>*, without making any allowance for `\sidebartopsep`. The default, which assumes that the default `\sidebartopsep` is used, is:

```
\setsidebarheight{\textheight}
```

Perhaps you would like the sidebars to start two lines below the top of the textblock but still end at the bottom of the textblock? If so, and you are using the `calc` package, then the following will do the job:

```
\setlength{\sidebartopskip}{2\onelineskip}
```

```
\setsidebarheight{\textheight-\sidebartopskip}
```

Although you can set the parameters for your sidebars individually it is more efficient to use the `\setsidebars` command; *it must* be used if you change the font and/or the height.

`\setsidebars{<hsep>}{<width>}{<vsep>}{<topsep>}{}{<height>}`

The `\setsidebars` command can be used to set the sidebar parameters. `\sidebarhsep` is set to $\langle hsep \rangle$, `\sidebarwidth` is set to $\langle width \rangle$, `\sidebarvsep` is set to $\langle vsep \rangle$, `\sidebartopsep` is set to $\langle topsep \rangle$, `\sidebarfont` is set to $\langle font \rangle$, and finally `\setsidebarheight` is used to set the height to $\langle height \rangle$. The default is:

```
\setsidebars{\marginparsep}{\marginparwidth}{2\onelineskip}{0pt}{}{\textheight}
```

The empty $\langle font \rangle$ argument means that the normal body font will be used. Any, or all, of the arguments can be a `*`, in which case the parameter corresponding to that argument is unchanged. Repeating the above example of changing the topskip and the height, assuming that the other defaults are satisfactory except that the width should be 3cm and an italic font should be used:

```
\setsidebars*{3cm}{*}{2\onelineskip}{\itshape}{\textheight-\sidebartopsep}
```

Changing the `\marginpar` parameters, for example with `\setmarginnotes`, will not affect the sidebar parameters.

Note that `\checkandfixthelayout` neither checks nor fixes any of the sidebar parameters. This means, for instance, that if you change the `\textheight` from its default value and you want sidebars to have the same height then after changing the `\textheight` you have to call `\checkandfixthelayout` and then call `\setsidebars` with the (new) `\textheight`. For instance:

```
...
\settypeblocksize{40\baselineskip}{5in}{*}
...
\checkandfixthelayout
\setsidebars{...}{...}{...}{...}{...}{\textheight}
```

Unfortunately if a sidebar is on a double column page that either includes a double column float or starts a new chapter then the top of the sidebar comes below the float or the chapter title. I have been unable to eliminate this ‘feature’.

5.2 Side notes

```
\sidepar{\langle left \rangle}[\langle right \rangle]
\sideparvshift
```

`\sidepar` provides a fixed version of `\marginpar`. In the original version the marginal text could shift up or down depending on the presence or absence of ascenders and descenders in the marginal text and the main line text. The length `\sideparvshift` was provided to enable the shift to be compensated for, and its default value was -2.08ex. Dan Luecking has provided the new version of `\sidepar` whereby the marginal text does not shift and the default value of `\sideparvshift` is now 0pt.

5.3 Verse

There are some additions to the code for verse.

```
\vleftofline{\langle text \rangle}
```

A verse line may start with something, for example open quote marks, where it is desirable that it be ignored as far as the alignment of the remainder of the line is concerned¹ — a sort of ‘hanging left punctuation’. When it is put at the start of a line in the `verse` environment the `<text>` of `\leftofline` is typeset but ignored as far as horizontal indentation is concerned.

Compare the two settings below:

```
\noindent “No, this is what was spoken by the prophet Joel:
\begin{verse}
“\,“\,“In the last days,” God says, \
“I will pour out my Spirit on all people. \
Your sons and daughters will prophesy, \
\ldots \
And everyone who calls \ldots ’\,’
\end{verse}
```

“No, this is what was spoken by the prophet Joel:

```
“““In the last days,” God says,
“I will pour out my Spirit on all people.
Your sons and daughters will prophesy,
...
And everyone who calls ...””
```

```
\noindent “No, this is what was spoken by the prophet Joel:
\begin{verse}
\leftofline{“\,“\,“}In the last days,” God says, \
\leftofline{“}I will pour out my Spirit on all people. \
Your sons and daughters will prophesy, \
\ldots \
And everyone who calls \ldots ’\,’
\end{verse}
```

“No, this is what was spoken by the prophet Joel:

```
“““In the last days,” God says,
“I will pour out my Spirit on all people.
Your sons and daughters will prophesy,
...
And everyone who calls ...””
```

`\leftmargin`

In the basic LaTeX `verse` environment the body of the verse is indented from the left of the text block by an amount `\leftmargini`, as is the text in many other environments based on the basic LaTeX `list` environment. For memoir’s `verse` environment only, the default indent is set by the length `\leftmargin` (which is initially set equal to `\leftmargini`). For poems with particularly long lines it could, for example, be advantageous to eliminate any indentation via:

```
\setlength{\leftmargin}{0em}
```

¹The problem was presented to me by Matthew Ford who also provided the example text.

If necessary the verse could even be moved into the left margin by giving `\leftmargin` a negative length value, such as `-0.3em`.

Later, for poems with shorter lines the indentation can be reset to the default by:

```
\setlength{\leftmargin}{\leftmargini}
```

```
\verselinenumbersright \verselinenumbersleft
```

Following the declaration `\verselinenumbersright`, which is the default, any verse line numbers will be set in the righthand margin. The `\verselinenumbersleft` declaration will set any subsequent line numbers to the left of the lines.

```
\setverselinums{<first>}{<startat>}
```

The `\setverselinums` macro can be used to specify that the number of the first line of the following verse shall be `<first>` and that the first printed line number shall be `<startat>`. For example, perhaps you are quoting part of a numbered poem. The original numbers every fifth line but if your extract starts with line 7 then

```
\setverselinums{7}{10}
```

is what you will need.

5.4 Boxed verbatims

```
\setbvlinenums{<first>}{<startat>}
```

The `\setbvlinenums` macro can be used to specify that the number of the first line of the following `boxedverbatim` shall be `<first>` and that the first printed line number shall be `<startat>`. It is similar to the `\setverselinums` command.

```
\bvendofpage{<code>}
```

A boxed verbatim may extend across a page break and the `\bvendofpage` macro determines what happens at the bottom of the page just before the break. The default definition is:

```
\newcommand{\bvendofpage}{\hrule\kern-.4pt}
```

which results in a horizontal rule being drawn. A `\hrule` takes 0.4pt of vertical space and the `\kern` of -0.4pt backs up by 0.4pt vertically, so as far as \TeX is concerned no space has been used. You may change the macro to something that better matches your needs if necessary.

5.5 Lists

Normally within a `list` environment paragraphs are indented by `\listparindent`. By default this is set to 0pt, which can be overridden in the second argument to the `list` environment (i.e. `<layout>`).


```
\begin{list}{\langle label \rangle}{\langle layout \rangle} \item ... \end{list}
\listparindent
\everylistparindent
```

The class, though, initialises `\listparindent` to `\everylistparindent`, which in turn is initialized to 0pt.

```
\defaultlists
```

The command `\defaultlists` sets the layout parameters for the `list` environment to their default values.

```
\tightlists \tightlists*
\firmlists \firmlists*
```

Following the `\tightlists` declaration the layout of list environments, such as `itemize`, `enumerate` or `description`, is tightened up by removing any internal vertical spacing within the list. If there is a blank line before the list, then a vertical space of half `\onelineskip` is put before and after the list. This space is not added when the `\tightlist*` declaration is given. In a tight list the paragraph indentation is set to the value of the regular `\parindent` paragraph indentation by setting `\everylistparindent` to `\parindent` (otherwise they would be block paragraphs with no interparagraph spaces).

The `\firmlists` declaration sets the vertical spacing in lists midway between their default values and those for `\tightlists`. The starred version, `\firmlists*` reduces the space before and after a list a little below that for the unstarred declaration.

The regular list layout can be set at any time by issuing the `\defaultlists` declaration.

This document is set using `\tightlists`. If you are going to use any of the non-default list settings, then I suggest that this one is perhaps the most useful.

5.6 Vertical minipage

The `minipage` environment puts its contents into a box, which TeX treats as though it were a single character. More fully, TeX typesets the material in the box, but then ignores the box content when positioning the result. You can put two or more `minipages` on a single line with text between them.

If you have a paragraph of text, then a `minipage` followed by another paragraph of text, TeX ignores the box contents when deciding on the space above and below the `minipage`. If the `\baselineskip` is larger than normal then the spacing around the `minipage` will not match the general leading.

```
\begin{vminipage} [\langle pos \rangle] [\langle height \rangle] [\langle innerpos \rangle] {\langle width \rangle} ...
\end{vminipage}
```

The `vminipage` environment is a vertical form of the `minipage` environment. It forms a paragraph by itself with the correct spacing between it and the previous and following

paragraph. It takes the same arguments as does `minipage`, including the $\langle pos \rangle$ optional argument which has no effect.²

²I included the $\langle pos \rangle$ argument so that it would be a simple edit to convert `minipage` to `vminipage` without having to be concerned with changing any arguments.

Six

Captions

6.1 Side captions

The class now provides for placing captions at the side of figures or tables, or other floats.

```
\begin{sidecaption} [<fortoc>] {<title>} [<label>]  
the body of the float  
\end{sidecaption}
```

The `sidecaption` environment is used for a sidecaption rather than a macro. The body of the float is put inside the environment. For example:

```
\begin{figure}  
  \begin{sidecaption}{An illustration}[fig:ill]  
    \centering  
    \includegraphics{...}  
  \end{sidecaption}  
\end{figure}
```

whereby the caption, ‘Figure N: An illustration’, will be placed in the margin alongside the graphic, and for reference purposes will be given given the `\label fig:ill`.

```
\sidecapwidth \sidecapsep  
\setsidcaps{<sep>}{<width>}
```

The caption is set in a box `\sidecapwidth` wide (the default is `\marginparwidth`) offset `\sidecapsep` (default `\marginparsep`) into the margin. The command `\setsidcaps` sets the `\sidecapsep` and `\sidecapwidth` to the given values. Changing the marginpar parameters, for example with `\setmarginnotes`, will not change the side caption settings. Note also that `\checkandfixthelayout` neither checks nor fixes the side caption parameters.

```
\sidecapmargin{<margin>}  
\ifscapmargleft \scapmarglefttrue \scapmargleftfalse
```

If the float is a single column float in a twocolumn document then the caption is always¹ placed in the adjacent margin, otherwise the `\sidecapmargin` command controls

¹Well, nearly always. See the `\overridescapmargin` command later.

6. CAPTIONS

the margin where the sidecaption will be placed. The possible values for $\langle margin \rangle$ are one of: `left`, `right`, `inner`, or `outer`. If `left` or `right` is specified the caption will go into the left or right margin. If `inner` or `outer` is specified then in a two sided document the caption will be on different sides of the textblock according to whether it is a recto or verso page; in a one sided document the caption margin is fixed. The left margin is the default.

When the caption is to be set in the left margin, `\ifscapmargleft` is set `true`, and for a right margin it is set `false`.

```
\setsidecappos{ $\langle pos \rangle$ }
```

By default a sidecaption is vertically centered with respect to the float it is captioning. This can be altered by using the `\setsidecappos` declaration. The allowed values for $\langle pos \rangle$ are:

- `t` — the top of the caption is aligned with the top of the float
- `c` — (the default) the center of the caption is aligned with the center of the float
- `b` — the bottom of the caption is aligned with the bottom of the float

The other kinds of simple captions can also be put at the side of a float. The positioning and styling commands for these are exactly those for `sidecaption`. Bilingual captions can only be placed above or below the float.

```
\begin{sidecontcaption}{ $\langle title \rangle$ }[ $\langle label \rangle$ ]  
the body of the float  
\end{sidecontcaption}
```

Sidecaptions may be continued with the `sidecontcaption` environment.

```
\begin{sidenamedlegend}[ $\langle fortoc \rangle$ ]{ $\langle title \rangle$ }  
the body of the float  
\end{sidenamedlegend}
```

Named legends may be set at the side with the `sidenamedlegend` environment.

```
\begin{sidelegend}{ $\langle title \rangle$ }  
the body of the float  
\end{sidelegend}
```

Legends may be set at the side with the `sidelegend` environment.

TWEAKS

```
\sidecapstyle
```

Just before the caption is set, the `\sidecapstyle` command is called. This may be used to set the styling for the particular caption. By default it sets captions that are in the left margin `raggedleft`, and those that are in the right margin are set `raggedright`. The default definition is:

```

\newcommand*{\sidecapstyle}{%
%% \captionnamefont{\bfseries}%
\ifscapmargleft
\captionstyle{\raggedleft}%
\else
\captionstyle{\raggedright}%
\fi}

```

You can change the command to suit your purposes; for example, uncommenting the `\captionnamefont` line would result in the caption's float name being set in a bold font. See the manual for more information on what you can do to change the appearance of a caption.

```

\overridescapmargin{<margin>}
\sidecapraise

```

Sometimes the caption may not be placed exactly where you want it — it may be in the wrong margin or at the wrong height.

The command `\overridescapmargin` will force the following caption into the *<margin>* you specify which can only be left or right. In a twosided document where `\sidecapmargin` is inner or outer and the caption goes in the wrong margin, it is likely that the declaration `\strictpagechecktrue` will solve the problem. The wrong margin might be chosen in a twocolumn document where the float is in the second column; use

```
\overridescapmargin{right}
```

to fix this.

The caption may not be at quite the height you want with respect to the float. The caption will be raised by the length `\sidecapraise` in addition to the calculated movement (or lowered if `\sidecapraise` is negative).

```
\sidecapfloatwidth{<length>}
```

The float is set in a minipage with width `sidecapfloatwidth`, whose default definition is

```
\newcommand*{\sidecapfloatwidth}{\linewidth}
```

That is, the normal width is the same as the current `\linewidth`. For a narrow table, say, you may want to reduce this, for example to half by

```
\renewcommand*{\sidecapfloatwidth}{0.5\linewidth}
```

Note that `\sidecapfloatwidth` is a macro, not a length, so it must be altered by using a `\renewcommand*`, not by `\setlength`.

If you do reduce the `\sidecapfloatwidth` you may notice that the sidecaption is actually placed a distance `\sidecapsep` with respect to the float's minipage, not with respect to the text block.

Table 6.1 was created by the following code.

```

\newlength{\mylength}
\setlength{\mylength}{\linewidth}
\addtolength{\mylength}{-\sidecapsep}
\addtolength{\mylength}{-\sidecapwidth}

```

Table 6.1: Permitted arguments for some sidecaption related commands

<code>\sidecapmargin</code>	<code>\overridescapmargin</code>
left	left
right	right
inner	
outer	

```
\begin{table}
\sidecapmargin{left}%
\renewcommand*{\sidecapfloatwidth}{\mylength}%
\raggedleft
\begin{sidecaption}{%
  Permitted arguments for some sidecaption related commands}[scap:one]
\centering
\begin{tabular}{cc} \toprule
\cs{sidecapmargin} & \cs{overridescapmargin} \\ \midrule
\texttt{left}      & \texttt{left}      \\
\texttt{right}     & \texttt{right}     \\
\texttt{inner}     & \\
\texttt{outer}     & \\ \bottomrule
\end{tabular}
\end{sidecaption}
\end{table}
```

The calculations on the `\mylength` length are so that the sidecaption and float will just fit inside the textblock.

Note that the `\raggedleft` command before the `sidecaption` environment makes the float's minipage be placed raggedleft (i.e., moved across to the right hand edge of the textblock) while the `\centering` centers the `tabular` within the minipage. You can get a variety of horizontal placements by judicious use of `\raggedright`, `\centering` and `\raggedleft` commands. If you do move the float sideways to leave space for the caption make sure that the caption will go to the side you want. In the example code I 'moved' the float to the right so I made sure that the caption would go on the left by explicitly setting

```
\sidecapmargin{left}
```

As far as TeX is concerned a sidecaption takes no horizontal space. If you use a sidecaption in a wrapped float from, say, the `wrapfig` package, make sure that the sidecaption gets placed where it won't be overlaid by the main text.

6.2 Caption title text

`\captiontitlefinal{<stuff>}`

`\captiontitlefinal{<stuff>}` will put `<stuff>` immediately at the end of a caption's title, but `<stuff>` will not appear in the LoF or LoT. The default is

```
\captiontitlefinal{}
```

but it could be called instead as, say

`\captiontitlefinal{.}`
to put a period (full stop) after the title.

Seven

Miscellaneous

7.1 General

FONT COMMANDS

The `\em` command is no longer deprecated (it was a misreading on my part to deprecate it in the first place).

`\eminnershape{<shape>}`

If the `\emph` command is used within italic text then the newly emphasized text will be typeset using the `\eminnershape` font shape. The default definition is:

```
\newcommand*{\eminnershape}{\upshape}
```

which you can change if you wish.

FLOATS

A page which consists of floats (e.g., `table`, `figure`) with no body text is called a *floatpage*. By default, floats on a floatpage are centered vertically. To move the floats to the top of the page try

```
\makeatletter
\setlength{\@fptop}{0pt}
\setlength{\@dblftop}{0pt}
\makeatother
```

To move the floats to the bottom of the page, replace `\@fptop` and `\@dblftop` by `\@fpbot` and `\@dblfpbot` respectively.

`\setfloatlocations{<float>}{<locs>}`

You can set the location for all floats of type `<float>` to `<locs>` with the `\setfloatlocations` declaration. The class initialises these using:

```
\setfloatlocations{figure}{tbp}
\setfloatlocations{table}{tbp}
```

One author thought it would be nice to be able to have different page headings according to whether the page was a floatpage, or there was a float at the top of the page, or a float at the bottom of a page or there was text at the top and bottom.

This, I think, is not a common requirement and, further, that to provide this involves changing parts of the LaTeX output routine — something only to be tackled by the bravest

of the brave. If it were to be done then were best done in a package that could be easily ignored. The following is an outline of what might be done; I do not recommend it and if you try this and all your work dissappears then on your own head be it.

```
% notefloat.sty
\newif\iffloatattop
\floatattopfalse
\newif\iffloatatbot
\floatatbotfalse

\renewcommand*{\@addtotoporbot}{%
  \@getfpsbit \tw@
  \ifodd \@tempcnta
    \@flsetnum \@topnum
    \ifnum \@topnum>\z@
      \@tempswafalse
      \@flcheckspace \@toproom \@toplist
    \if@tempswa
      \@bitor\@currtype{\@midlist\@botlist}%
    \if@test
      \else
        \@flupdates \@topnum \@toproom \@toplist
        \@inserttrue
\global\floatattoptrue
  \fi
  \fi
\fi
\if@insert
\else
  \@addtobot
\fi}

\renewcommand*{\@addtobot}{%
  \@getfpsbit 4\relax
  \ifodd \@tempcnta
    \@flsetnum \@botnum
    \ifnum \@botnum>\z@
      \@tempswafalse
      \@flcheckspace \@botroom \@botlist
    \if@tempswa
      \global\maxdepth \z@
      \@flupdates \@botnum \@botroom \@botlist
      \@inserttrue
\global\floatatbottrue
  \fi
  \fi
\fi}
```

```

\let\p@wold@output\@outputpage
\renewcommand*{\@outputpage}{%
  \p@wold@output
  \global\floatattopfalse
  \global\floatatbotfalse}

```

\endinput

\floatattop is probably set TRUE if there is a float at the top of the page and \floatatbot is probably set TRUE if there is a float at the bottom of the page.

TWO SIMPLE MACROS

There are two trivial macros that can be generally useful.

```

\memjustarg{<text>}
\memgobble{<text>}

```

The \memjustarg macro just uses its argument and is defined as:

```
\newcommand*{\memjustarg}[1]{#1}
```

The \memgobble macro gobbles down and swallows its argument. Its definition is:

```
\newcommand{\memgobble}[1]{}

```

Do *not* redefine either \memjustarg or \memgobble; if you do various pieces of code will behave in unexpected ways that you will not like.

TRIM MARKS

```
\showtrimsoff \showtrimson
```

If the showtrims option has been used then the \showtrimsoff switches off the trim marks; the \showtrimson declaration, which is the default, switches on the trim marks. These declarations do nothing if the showtrims option is not used.

William Adams donated code to generate trim marks in the style of Quark Xpress register marks.

```

\quarkmarks
\registrationColour{<mark>}

```

Following the declaration \quarkmarks any trim marks will be in the style of Quark Xpress registration marks. Each mark is typeset using \registrationColour. The default definition is simply:

```
\newcommand*{\registrationColour}[1]{#1}
```

but you can change that to, say, print the marks in a particular color.

TIME

```

\printtime \printtime*
\hmpunct \amname \pmname

```

The `\printtime` command¹ prints the time of day when the document is processed using the 24 hour clock while `\printtime*` uses a 12 hour clock. For example, the effect of the next piece of code is shown below.

This document was processed on: `\today\ at \printtime\ (\printtime*)`.
This document was processed on: December 14, 2007 at 21:13 (9:13 pm).

The punctuation between the hours and minutes is `\hmpunct` which defaults to a colon (:). The macros `\amname` and `\pmname` hold the abbreviations for *ante meridiem* and *post meridiem*, respectively; the defaults are ‘am’ and ‘pm’.

According to the *Chicago Manual of Style* [CMS93] there should be no punctuation between the hours and minutes in the 24 hour system. For the 12 hour system it recommends that small caps be used for the divisions of the day (e.g., A.M. and P.M.) and also that the American practice is to use a colon as the separator between hours and minutes whereas the English practice is to use a period (known to the English as a ‘full stop’). I don’t know what the traditions are in other orthographies.

The `\quarkmarks` declaration uses `\printtime`, so be careful if you change it.

Nicola Talbot’s `datetime` package [Tal06] provides a much more comprehensive collection of styles for printing the time; also for dates.

VERTICAL CENTERING

The manual describes one method for centering text vertically. The new `vplace` environment provides a simpler way.

`\begin{vplace} [num] text \end{vplace}`

The contents of the `vplace` environment are vertically centered. The optional `<num>` argument can be used to specify the ratio of the upper space to the lower space. You can put other text on the page above or below the centered text. The environment may be useful for title pages.

CHECKING FOR XeTeX

You have been able to use `\ifpdf` to check if pdfLaTeX is being used to process the document.

`\ifxetex \xetextrue \xetextfalse`

In a similar manner you can now use `\ifxetex` to check if the document is being processed by XeTeX.

7.2 For package writers

The facilities described in this section are for anyone to use but I suspect that they may be most useful to package developers.

¹I based the code on a similar macro in *TeX for the Impatient* [AHK90].

EMULATING PACKAGES

```
\EmulatedPackage{<package>}[<date>]
\EmulatedPackageWithOptions{<optionlist>}{<package>}[<date>]
```

These commands are for package writers; they are based on a conversation with Donald Arseneau on CTT. They fool L^AT_EX into thinking that the *<package>* has already been loaded so it won't try loading it again. These are probably only useful if your package includes the actual code for *<package>*.

memoir does include code from several packages and uses a similar internal command to ensure that the packages are not loaded following some later `\usepackage` command. The names of the emulated packages are written to the log file. At the time of writing the emulated packages are: abstract, appendix, array, booktabs, ccaption, chngcntr, crop, dcolumn, delarray, enumerate, epigraph, framed, ifmtarg, ifpdf, index, makeidx, moreverb, needspace, newfile, nextpage, pagenote, patchcmd, parskip, setspace, shortvrb, showidx, tabularx, titleref, tocbibind, tocloft, verbatim, and verse. As well as the emulated packages memoir provides functions equivalent to those in the following packages, although the class does not prevent you from using them: fancyhdr, geometry, sidecap, subfigure, and titlesec.

```
\DisemulatePackage{<package>}
```

This command undoes any prior `\EmulatedPackage` or `\EmulatedPackageWithOptions` for the *<package>* package. For example, if you wish to use the index package instead of memoir's emulation then put

```
\DisemulatePackage{index}
\usepackage{index}
```

in your preamble.

EXTENDING A MACRO

```
\patchcommand{<macro>}{<start-code>}{<end-code>}
```

The `\patchcommand` is from the late Michael Downes' patchcmd package [Dow00]. It inserts the *<start-code>* at the start of the current definition of the macro *<macro>*, and inserts *<end-code>* at the end of its current definition. The *<macro>* can have zero to nine parameters. If *<macro>* uses `\futurelet` (e.g., it is a starred command or takes an optional argument) only *<start-code>* is useful — *<end-code>* must be empty otherwise things get messed up. If *<macro>* has any delimited arguments then `\patchcommand` cannot be used.

INSERTING CODE BEFORE AND AFTER A FILE, PACKAGE OR CLASS

The kernel provides two commands, `\AtBeginDocument` and `\AtEndDocument` which can only be used in the preamble, for inserting code at the start and end of the document environment.

The kernel also provides the macros `\AtEndOfPackage{<code>}` and `\AtEndOfClass{<code>}` for inserting code at the end of the current package or class.

More precisely, these macros call the `<code>` after the package or class file has been input via `\InputIfFileExists`.

The class provides a more comprehensive set of macros for code insertions, which should be used before the relevant file is called for.

```
\AtBeginFile{<file>}{<code>}  
\AtEndFile{<file>}{<code>}
```

The `\AtBeginFile` macro inserts `<code>` just before the `<file>` file is `\input` (or `\included`, etc.). Similarly `\AtEndFile` inserts the `<code>` immediately after the `<file>`. The `<file>` argument must be the same as used in the corresponding `\input` command. If `<file>` includes an extension, for example `fred.def`, then that is taken as the complete name, otherwise if there is no extension, for instance `fred`, then the `.tex` extension is automatically appended making the full name `fred.tex`.

The `\At...File` commands must be issued *before* the corresponding `<file>` is input otherwise nothing will happen.

```
\AtBeginPackage{<pack>}{<code>}  
\AtEndPackage{<pack>}{<code>}  
\RequireAtEndPackage{<pack>}{<code>}
```

The `\AtBeginPackage` command will insert `<code>` just before the `<pack>` package is used. Similarly `\AtEndPackage` will insert the `<code>` immediately after the `<pack>`. The `<pack>` argument must be the same as used in the corresponding `\usepackage` command, that is, without any extension. The `\At...Package` commands must be issued *before* the corresponding `<pack>` is used otherwise nothing will happen.

The `\RequireAtEndPackage` command will, like `\AtEndPackage`, insert `<code>` at the end of the `<pack>` package if it has not yet been used. If the package has already been used then the `<code>` is called immediately.

```
\AtBeginClass{<class>}{<code>}  
\AtEndClass{<class>}{<code>}  
\RequireAtEndClass{<class>}{<code>}
```

The `\AtBeginClass` command will insert `<code>` just before the `<class>` class is used. Similarly `\AtEndClass` will insert the `<code>` immediately after the `<class>`. The `<class>` argument must be the same as used in the corresponding `\LoadClass` command, that is, without any extension. The `\At...Class` commands must be issued *before* the corresponding `<class>` is used otherwise nothing will happen.

The `\RequireAtEndClass` command will, like `\AtEndClass`, insert `<code>` at the end of the `<class>` class if it has not yet been used. If the class has already been used then the `<code>` is called immediately.

There is an unfortunate interaction between the kernel's `\AtEndOfPackage` and the class's `\AtEndPackage`, and similarly for the `\AtEndOfClass` and `\AtEndClass`. I discovered this when I tried to automate using the `memhfixc` package if `hyperref` was being used by putting the following into the memoir code

```
\AtEndPackage{hyperref}{\usepackage{memhfixc}}
```

which caused all sorts of problems.

The kernel scheme looks like this:

```
\newcommand{\usepackage}[1]{%
```

```
...
```

```
\InputIfFileExists{#1}
```

```
<AtEndOfPackage code>}
```

The basic mechanism for implementing the class macros is by modifying the kernel's `\InputIfFileExists` macro, which internally uses a form of `\input` to read in the file, so that the inserted *<code>* comes immediately before and after the `\input`, somewhat like:

```
\renewcommand{\InputIfFileExists}[1]{%
```

```
...
```

```
<before code> \input{#1} <after code>}
```

If `\AtEndPackage` is applied to a package that has an internal `\AtEndOfPackage` then the result can be sketched as:

```
\newcommand{\usepackage}[1]{%
```

```
...
```

```
<before code>
```

```
\input{#1}
```

```
<after code>
```

```
<AtEndOfPackage code>
```

```
}
```

In other words the body of the package is read in, the `\AtEndPackage` code is called, and then *after* that the `\AtEndOfPackage` code is called.

The `hyperref` package internally uses `\AtEndOfPackage` to read some files and `memhfixc` had to be input after these. A way to automate `memhfixc` after `hyperref` is:

```
\AtEndPackage{hyperref}{%
```

```
\AtBeginDocument{\usepackage{memhfixc}}
```

but this seems more trouble than it's worth especially since Heiko Oberdiek has kindly updated `hyperref` so that versions after 2006/11/15 will automatically load the `memhfixc` package.

CHECKING FOR ETEX

Modern LaTeX distributions use `etex`, which is an extended version of TeX, as the underlying engine. `etex` provides some more primitives than TeX, which may be useful, but not everybody has `etex` available.

```
\ifetex
```

`\ifetex` can be used to determine if `etex` is being used as the underlying engine; it is analogous to `\ifpdf` which tests for PDF output. For example:

```
\ifetex
```

```
%%% code only processible by etex
```

```
\else
```

```
\typeout{etex is not available}
```

`\fi`

7.3 Heading hooks

On 2nd September 2005 I posted two messages to the `comp.text.tex` newsgroup saying that I was creating a new version of memoir and that I would consider inserting hooks into the class code that package writers might find useful. I got no requests for any hooks or anything else from package writers. I therefore assume that no package author sees any problems if a memoir class document author uses the package.

However, I have provided macros that may be useful for those who want to do things with the contents of section headings, captions, and the like. The macros are called within the relevant heading or caption code, and by default are defined to do nothing.

Hooks for the `\book` and `\book*` commands.

```
\membookinfo{<thebook>}{<fortoc>}{<title>}
\membookstarinfo{<title>}
```

Hooks for the `\part` and `\part*` commands.

```
\mempartinfo{<thepart>}{<fortoc>}{<title>}
\mempartstarinfo{<title>}
```

In many cases a `\mem...info` macro includes an argument related to the heading's number (`<thepart>` for `\mempartinfo`). In certain circumstances, such as a `\chapter` in the `\frontmatter`, there might not be a number even though the normal unstarred version of the command is used. In these cases the number argument (`<thechapter>` in the case of `\memchapinfo`) is left empty.

Hooks for the `\chapter` and `\chapter*` commands. Note that regular chapters and those as appendices are treated differently.

```
\memchapinfo{<thechapter>}{<fortoc>}{<forhead>}{<title>}
\memchapstarinfo{<fortoc>}{<title>}
\memappchapinfo{<thechapter>}{<fortoc>}{<forhead>}{<title>}
\memappchapstarinfo{<fortoc>}{<title>}
```

Hooks for `\section`, `\subsection`, etc., and their starred versions. `<name>` is the type of section (e.g., `section`, or `subsection`, or `subsubsection` or ...).

```
\memsecinfo{<name>}{<thename>}{<fortoc>}{<forhead>}{<title>}
\memsecstarinfo{<name>}{<title>}
```

Hooks for appendix-like page headings.

```
\memapppageinfo{<title>}
\memapppagestarinfo{<title>}
\memleadpageinfo{<pstyle>}{<cmdname>}{<title>}
\memleadpagestarinfo{<pstyle>}{<cmdname>}{<title>}
```

Hooks for `\poemtitle`, `\PoemTitle`, and their starred versions.


```
\mempoeminfo{<title>}
\mempoemstarinfo{<title>}
\memPoemTitleinfo{<thepoem>}{<fortoc>}{<forhead>}{<title>}
\memPoemTitlestarinfo{<fortoc>}{<title>}
```

Hooks for the several kinds of `\caption` and `\legend` commands.

```
\memcaptioninfo{<type>}{<thetype>}{<fortoc>}{<title>}
\memlegendinfo{<title>}
\memnamedlegendinfo{<fortoc>}{<title>}
\membitwonumcaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}
    {<name2>}{<fortoc2>}{<title2>}
\membionenumcaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}
    {<name2>}{<fortoc2>}{<title2>}
\membicaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}{<name2>}{<title2>}
```

As an example of how one of these macros might be used, just before the start of this section I put

```
\renewcommand{\memsecinfo}[5]{\edef\Margi{#1}\edef\Margii{#2}%
    \edef\Margiii{#3}\edef\Margiv{#4}%
    \edef\Margv{#5}}
```

and now I'm putting

The arguments are: (1) '`\Margi`', (2) '`\Margii`', (3) '`\Margiii`',
(4) '`\Margiv`', (5) '`\Margv`'.

The arguments are: (1) 'section', (2) '7.3', (3) 'Heading hooks', (4) 'Heading hooks', (5) 'Heading hooks'.

DOCUMENTING LATEX COMMANDS

The class provides a few macros to help you if you want to describe LaTeX commands.

```
\bs \cs{<name>} \cmdprint{<cmd>} \cmd{<cmd>}
```

The macro `\bs` simply prints the '`\`' backslash.

The macro `\cs` prints its argument, putting a backslash in front of it. For example `\cs{name}` prints `\name`.

The argument to `\cmdprint` should be the name of a macro, including the backslash. It is then printed as is. For instance `\cmdprint{\amacro}` prints `\amacro`.

The argument to `\cmd` should be the name of a macro, including the backslash. It is then printed, using `\cmdprint`, and also added to the index file with the assumption that ? will be used as the 'actual' character (the default is @ which is not of much use if you are trying to index macro names that have @ as part of their names).

```
\meta{<arg>} \marg{<arg>} \oarg{<arg>} \parg{<arg>}
```

The macro `\meta{<arg>}` prints `<arg>` for an argument to a macro.

The macro `\marg{<arg>}` prints `{<arg>}` for a required argument.

The macro `\oarg{<arg>}` prints `[<arg>]` for an optional argument.

The macro `\parg{<arg>}` prints `(<arg>)` for a parenthesized argument.

Command summary

<code>\abnormalparskip{<length>}</code>	Sets the <code>\parskip</code> to <code><length></code>	11
<code>\addtonotes{<text>}</code>	Inserts <code><text></code> into the endnotes <code>ent</code> file.	50
<code>afterbook</code>	Page style applied to the blank page, if any, following a book title page. Defaults to <i>empty</i>	15
<code>\afterbookskip</code>	Macro called after setting a book title	16
<code>afterpart</code>	Page style applied to the blank page, if any, following a part title page. Defaults to <i>empty</i>	17
<code>\afterpartskip</code>	Vertical space after a part heading	1
<code>\afterPoemTitle</code>	Called after printing the title of a <code>\PoemTitle</code>	30
<code>\afterPoemTitlenum</code>	Called after printing the number of a <code>\PoemTitle</code>	30
<code>\afterPoemTitleskip</code>	Vertical space after a poem title	30
<code>\amname</code>	Abbreviation for ante meridiem used in <code>\printtime*</code> (default am)	66
<code>\AtBeginClass{<pack>}{<code>}</code>	Inserts <code><code></code> just before the <code><class></code> class is used.	68
<code>\AtBeginFile{<file>}{<code>}</code>	Inserts <code><code></code> just before the <code><file></code> is input (or included, etc.).	68
<code>\AtBeginPackage{<pack>}{<code>}</code>	Inserts <code><code></code> just before the <code><pack></code> package is used.	68
<code>\AtEndClass{<class>}{<code>}</code>	Inserts <code><code></code> just after the <code><class></code> class is used.	68
<code>\AtEndFile{<file>}{<code>}</code>	Inserts <code><code></code> just after the <code><file></code> is input (or included, etc.).	68
<code>\AtEndPackage{<pack>}{<code>}</code>	Inserts <code><code></code> just after the <code><pack></code> package is used.	68
<code>\atendtheglossaryhook</code>	Vacuous macro called as the first thing by <code>\end{theglossary}</code>	44
<code>\beforebookskip</code>	Macro called before setting any part of a book page	16
<code>\beforepartskip</code>	Vertical space before a part heading.	1
<code>\beforePoemTitleskip</code>	Vertical space before a poem title.	30

<code>\begintheglossaryhook</code>	44
Vacuous macro called as the last thing by <code>\begin{theglossary}</code> .	
<code>\bibmark</code>	4
May be used by pagestyles for Bibliography page headers	
<code>\book[<toc-title>]{<title>}</code>	15
Typsets a numbered book title and adds the number and title to the ToC.	
<code>\book*{<title>}</code>	15
Typsets an unnumbered book title and puts nothing in the ToC.	
<code>\bookblankpage</code>	15
Declaration for a blank page to be output after a book title page. This is the default.	
<code>\bookmark{<forhead>}</code>	15
For setting any marks containing the text of a header for a <code>\book</code> .	
<code>\bookname</code> The name for a book division (default Book).	16
<code>\booknamenum</code>	16
Macro called after <code>\printbookname</code> and before <code>\printbooknum</code> . Defaults to a space.	
<code>\booknamefont</code>	16
Font used for printing a book name. Defaults to a <code>\huge</code> bold font.	
<code>\booknumfont</code>	16
Font used for printing a book number. Defaults to a <code>\huge</code> bold font.	
<code>book</code> Page style applied to the book title page. Defaults to <i>empty</i>	15
<code>\booktitlefont</code>	16
Font used for printing a book title. Defaults to a <code>\Huge</code> bold font.	
<code>bringhurst</code>	21
A raggedright, unnumbered, small caps chapterstyle with a textwidth rule below.	
<code>brotherton</code>	23
A chapterstyle like the default except that the number is spelt out.	
<code>\bs</code> prints <code>\</code>	71
<code>\bvendofpage{<code>}</code>	54
Controls the appearance of a page break in a boxed verbatim.	
<code>\captiontitlefinal{<stuff>}</code>	60
Puts <code><stuff></code> immediately at the end of a caption's title, but not in the LoF or LoT.	
<code>\cftappendixname</code>	33
In the ToC, called before the number of a chapter forming an appendix.	
<code>\cftbeforebookskip</code> Space before a book entry in the ToC.	37
<code>\cftbookaftersnum</code>	37
Macro called after a book number in the ToC in the number box.	
<code>\cftbookaftersnumb</code>	37
Macro called after a book number's box in the ToC.	
<code>\cftbookdotsep</code>	37
Separation between the dots on a book leader in the ToC.	
<code>\cftbookfont</code>	37
Font for typesetting a book number and title in the ToC.	
<code>\cftbookformatpnum{<pnum>}</code>	37
Format for typesetting a <code>\book</code> 's page number in the ToC.	

<code>\cftbookindent</code>	37
Indent of a ToC book entry from the left margin.	
<code>\cftbookleader</code>	37
Typesets the leader between a book title and page number in the ToC.	
<code>\cftbookname</code> In the ToC, called before the number of a book.	37
<code>\cftbooknumwidth</code>	37
Space allowed for a book entry's number in the ToC.	
<code>\cftbookpagefont</code>	37
Font for typesetting a book's page number in the ToC.	
<code>\cftbookpresnum</code>	37
Macro called before a book number in the ToC in the number box.	
<code>\cftchapterformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\chapter</code> 's page number in the ToC.	
<code>\cftchaptername</code>	33
In the ToC, called before the number of a chapter.	
<code>\cftfigureformatpnum{<pnum>}</code>	36
Format for typesetting a figure's page number in the LoF.	
<code>\cftfigurename</code> In the LoF, called before the number of a figure.	34
<code>\cftinsertcode{<name>}{<code>}</code>	36
Defines ToC (LoF, LoT) <code><name></code> insertion to be <code><code></code> .	
<code>\cftinserthook{<file>}{<name>}</code>	36
Inserts code <code><name></code> into <code><file></code> (e.g., toc, lof, etc.).	
<code>\cftparagraphformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\paragraph</code> 's page number in the ToC.	
<code>\cftparagraphname</code>	34
In the ToC, called before the number of a paragraph.	
<code>\cftpartformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\part</code> 's page number in the ToC.	
<code>\cftpartname</code> In the ToC, called before the number of a part.	33
<code>\cftsectionformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\section</code> 's page number in the ToC.	
<code>\cftsectionname</code>	34
In the ToC, called before the number of a section.	
<code>\cftsubfigureformatpnum{<pnum>}</code>	36
Format for typesetting a subfigure's page number in the LoF.	
<code>\cftsubparagraphformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\subparagraph</code> 's page number in the ToC.	
<code>\cftsubparagraphname</code>	34
In the ToC, called before the number of a subparagraph.	
<code>\cftsubsectionformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\subsection</code> 's page number in the ToC.	
<code>\cftsubsectionname</code>	34
In the ToC, called before the number of a subsection.	
<code>\cftsubsubsectionformatpnum{<pnum>}</code>	36
Format for typesetting a <code>\subsubsection</code> 's page number in the ToC.	
<code>\cftsubsubsectionname</code>	34
In the ToC, called before the number of a subsubsection.	

<code>\cftsubtableformatpnum{⟨pnum⟩}</code>	36
Format for typesetting a subtable's page number in the LoT.	
<code>\cfttableformatpnum{⟨pnum⟩}</code>	36
Format for typesetting a table's page number in the LoT.	
<code>\cfttablename</code> In the LoT, called before the number of a table.	34
<code>\changeglossactual[⟨file⟩]{⟨char⟩}</code>	43
Specifies <code>⟨char⟩</code> as the actual character for glossary <code>⟨file⟩</code> .	
<code>\changeglossnum[⟨file⟩]{⟨thecounter⟩}</code>	43
Specifies <code>⟨thecounter⟩</code> as the <code>⟨num⟩</code> for glossary <code>⟨file⟩</code> .	
<code>\changeglossnumformat[⟨file⟩]{⟨format⟩}</code>	43
Specifies <code>⟨format⟩</code> as the format for <code>⟨num⟩</code> for glossary <code>⟨file⟩</code> .	
<code>\changeglossref[⟨file⟩]{⟨thecounter⟩}</code>	43
Specifies <code>⟨thecounter⟩</code> as the <code>⟨ref⟩</code> for glossary <code>⟨file⟩</code> .	
<code>chappell</code>	23
A centered chapterstyle with a rule between the number line (in a roman font) and the title line in italics.	
<code>\checkandfixthelayout[⟨algorithm⟩]</code>	7
Command to check and implement the page layout specifications, adjusting the <code>\textheight</code> using <code>⟨algorithm⟩</code> (classic, fixed, lines, or nearest, the default being classic) for the calculation.	
<code>\checkthelayout[⟨algorithm⟩]</code>	7
Command to check the page layout specifications, adjusting the <code>\textheight</code> using <code>⟨algorithm⟩</code> (classic, fixed, lines, or nearest, the default being classic) for the calculation.	
<code>\cmd{⟨cmd⟩}</code>	71
where <code>⟨cmd⟩</code> is a macro name like <code>\cmd</code> , prints and indexes <code>\cmd</code> .	
<code>\cmdprint{⟨cmd⟩}</code>	71
where <code>⟨cmd⟩</code> is a macro name like <code>\cmd</code> , prints <code>\cmd</code> .	
<code>\continuousnotenums</code>	48
Declaration to make the numbering of endnotes continuous throughout the document.	
<code>\cs{⟨name⟩}</code> prints <code>\name</code>	71
<code>culver</code>	23
One line, centered, bold chapterstyle using Roman numerals.	
 <code>dash</code>	 24
Two line, centered, regular font, chapterstyle. The number has a dash on either side.	
<code>default</code> The default book class chapterstyle.	24
<code>\defaultlists</code>	55
Command setting list layout parameters to their default values.	
<code>demo2</code>	24
A two line chapterstyle with a large sanserif title; the number is above, centered and written (e.g., Six instead of 6) in a bold font. There are rules above and below the title line. It is an improvement on the <code>demo</code> style.	
<code>demo3</code>	24
A two line chapterstyle with a large sanserif title; the number is above, centered and	

written (e.g., Six instead of 6) in an italic font. There are rules above and below the title line. It is a modified version of the <i>demo2</i> style.	
<code>\DisemulatePackage{⟨package⟩}</code>	67
Undo a previous <code>\EmulatedPackage</code> or <code>\EmulatedPackageWithOptions</code> for the <code>⟨package⟩</code> package.	
<code>\begin{DoubleSpace}</code> Environment form of <code>\DoubleSpacing</code>	12
<code>\DoubleSpacing</code> Declaration doubling the baselineskip.	11
 <code>ell</code>	24
A raggedleft large sanserif chapterstyle with the number in the margin. An ‘L’ shaped rule separates the number and title lines.	
<code>\eminnershape{⟨shape⟩}</code>	63
Font shape for emphasized text within emphasized text.	
<code>\EmulatedPackage{⟨package⟩}[⟨date⟩]</code>	67
Claim that the <code>⟨package⟩</code> package has been loaded.	
<code>\EmulatedPackageWithOptions{⟨optionlist⟩}{⟨package⟩}[⟨date⟩]</code>	67
Claim that the <code>⟨package⟩</code> package has been loaded with options <code>⟨optionlist⟩</code> .	
<code>\everylistparindent</code>	55
Default value for <code>\listparindent</code> — the paragraph indentation in a list environment.	
 <code>\firmlists</code>	55
Declaration for decreased vertical spacing in list-based environments. Some additional space may be added before and after.	
<code>\firmlists*</code>	55
Declaration for decreased vertical spacing in list-based environments. There is no additional space before or after.	
<code>\foottopagenote</code>	50
Declaration which turns <code>\footnotes</code> into <code>\pagenotes</code> .	
<code>\fussy</code>	9
Declaration for TeX to minimise interword space variations in justified text lines.	
 <code>ger</code>	24
A raggedright, large, bold, two line chapterstyle with rules above and below.	
<code>\glossary[⟨file⟩](⟨key⟩){⟨term⟩}{⟨description⟩}</code>	39
Adds <code>⟨term⟩</code> and its description, <code>⟨desc⟩</code> , to a glossary file — <code>\jobname.glo</code> by default or to <code>\file.glo</code> . The optional argument <code>⟨key⟩</code> can be used to provide a different sort key for <code>⟨term⟩</code> .	
<code>\glossarycolsep</code> Columns separation in a two column glossary.	44
<code>\glossaryintoc</code> Declaration to add glossary title to the ToC.	43
<code>\glossarymark</code> Redefine to specify marks for headers.	43
<code>\glossaryname</code> Name for a glossary.	43
<code>\glossaryrule</code>	44
Width of inter-column rule in a two column glossary.	
<code>\glossitem{⟨term⟩}{⟨desc⟩}{⟨ref⟩}{⟨num⟩}</code>	39
Glossary entry used in a <code>\theglossary</code> environment	

<code>\hmpunct</code>	66
Punctuation between hours and minutes in <code>\printtime</code> (default :)	
<code>\idtextinnotes{<id>}</code> Prints an endnote's id text	49
<code>\ifanappendix</code>	1
TRUE when processing an appendix, otherwise FALSE.	
<code>\ifetex</code>	69
TRUE if <code>etex</code> is the underlying engine, otherwise FALSE.	
<code>\ifsidecapleft</code>	57
true if sidecaptions will be set in the left margin, otherwise they will be set in the right margin.	
<code>\ifxetex</code> true if XeTeX is being used to process the document.	66
<code>\indexmark</code> May be used by <code>pagestyle</code> for Index page headers	4
<code>indextitlepagestyle</code> Page style for the first page of an index.	38
 <code>\leadpagetoclevel{<sec>}</code>	17
The ToC style for an entry from a <code>\newleadpage</code> generated command.	
<code>\begin{list}{<label>}{<layout>}</code>	55
List environment with entries introduced by <code>\item</code> . <code><label></code> is the default label for <code>\item</code> and <code>{<layout>}</code> specifies changes to the default layout.	
<code>\listparindent</code> Paragraph indentation in a list environment.	55
<code>lyhne</code>	24
A raggedleft bold sanserif chapter title set between two rules, with the name and number above. It requires the <code>graphicx</code> package.	
 <code>madsen</code>	24
A raggedleft large bold sanserif chapterstyle with the number in the margin and a rule between the number and title lines. It requires the <code>graphicx</code> package.	
<code>\makeglossary[<file>]</code>	39
Opens file <code>\jobname.glo</code> , or <code>\file.glo</code> , for glossary entries	
<code>\makepagenote</code>	46
Preamble command for enabling page/end notes.	
<code>\marg{<arg>}</code> prints <code>{<arg>}</code>	71
<code>\memappchapinfo{<thechapter>}{<fortoc>}{<forhead>}{<title>}</code>	70
Code hook into an appendix <code>\chapter</code>	
<code>\memappchapstarinfo{<fortoc>}{<title>}</code>	70
Code hook into an appendix <code>\chapter*</code>	
<code>\memapppageinfo{<title>}</code> Code hook into <code>\appendixpage</code>	70
<code>\memapppagestarinfo{<title>}</code>	70
Code hook into <code>\appendixpage*</code> .	
<code>\membicaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}{<name2>}{<title2>}</code> ..	71
Code hook into <code>\membicaption</code> .	
<code>\membionenumcaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}{<name2>}{<fortoc2>}{<title2>}</code>	71
Code hook into <code>\membionenumcaption</code> .	

<code>\membitwonumcaptioninfo{<type>}{<thetype>}{<fortoc1>}{<title1>}{<name2>}{<fortoc2>}{<title2>}</code>	71
Code hook into <code>\membitwonumcaption</code> .	
<code>\membookinfo{<thebook>}{<fortoc>}{<title>}</code>	70
Code hook into <code>\book</code>	
<code>\membookstarinfo{<title>}</code>	Code hook into <code>\book*</code>
<code>\memcaptioninfo{<type>}{<thetype>}{<fortoc>}{<title>}</code>	71
Code hook into <code>\caption</code>	
<code>\memchapinfo{<thechapter>}{<fortoc>}{<forhead>}{<title>}</code>	70
Code hook into <code>\chapter</code>	
<code>\memchapstarinfo{<fortoc>}{<title>}</code>	Code hook into <code>\chapter*</code>
<code>\memdskip</code>	12
Adjusts the display skips according to <code>\memdskipstretch</code> .	
<code>\memdskipstretch</code>	12
The current factor for increasing display skips.	
<code>\memglodesc{<desc>}</code>	Wrapper round a glossary description.
<code>\memglonum{<num>}</code>	Wrapper round glossary numbers.
<code>\memgloref{<ref>}</code>	Wrapper round a glossary ref.
<code>\memgloterm{<term>}</code>	Wrapper round a glossary term.
<code>\memgobble{<text>}</code>	Gobbles its argument. Do <i>not</i> redefine it.
<code>\memhyperindexfalse</code>	38
Preamble command to prevent hyperindexing.	
<code>\memjustarg{<text>}</code>	Definition is just <code><text></code> . Do <i>not</i> redefine it.
<code>\memleadpageinfo{<pstyle>}{<cmdname>}{<title>}</code>	70
Code hook into <code>\newleadpage</code> and <code>\renewleadpage</code> .	
<code>\memleadpageinfo{<pstyle>}{<cmdname>}{<title>}</code>	70
Code hook into <code>\newleadpage*</code> and <code>\renewleadpage*</code> .	
<code>\memlegendinfo{<title>}</code>	Code hook into <code>\legend</code>
<code>\memnamedlegendinfo{<fortoc>}{<title>}</code>	71
Code hook into <code>\namedlegend</code>	
<code>\mempartinfo{<thepart>}{<fortoc>}{<title>}</code>	Code hook into <code>\part</code>
<code>\mempartstarinfo{<title>}</code>	Code hook into <code>\part*</code>
<code>\mempoeminfo{<title>}</code>	Code hook into <code>\poemtitle</code>
<code>\mempoemstarinfo{<title>}</code>	Code hook into <code>\poemtitle*</code>
<code>\memPoemTitleinfo{<thepoem>}{<fortoc>}{<forhead>}{<title>}</code>	71
Code hook into <code>\PoemTitle</code>	
<code>\memPoemTitlestarinfo{<fortoc>}{<title>}</code>	71
Code hook into <code>\PoemTitle*</code>	
<code>\memsecinfo{<name>}{<thename>}{<fortoc>}{<forhead>}{<title>}</code>	70
Code hook into the <code>\name</code> section command	
<code>\memsecstarinfo{<name>}{<title>}</code>	70
Code hook into the <code>\name*</code> section command	
<code>\meta{<arg>}</code>	prints <code><arg></code> .
<code>\midbookskip</code>	16
Macro called between setting a book number and the title	
<code>\midpartskip</code>	1
Vertical space between a part number and the part title.	

<code>\midPoemTitleskip</code>	30
Vertical space between the number and text of a poem title.	
<code>\midsloppy</code>	9
Declaration for TeX to allow moderate interword space variations in justified text lines.	
<code>\begin{midsloppypar}</code>	9
Typeset contents of the enclosed paragraph(s) using <code>\midsloppy</code> .	
<code>\newleadpage[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}</code>	17
Creates a command <code>\cmdname</code> which typesets a part-like page with <code>⟨title⟩</code> and the <code>⟨page-style⟩</code> pagestyle, if given, otherwise it uses the empty pagestyle. The <code>⟨title⟩</code> is added to the ToC.	
<code>\newleadpage*[⟨page-style⟩]{⟨cmdname⟩}{⟨title⟩}</code>	17
Creates a command <code>\cmdname*</code> which typesets a part-like page with <code>⟨title⟩</code> and the <code>⟨page-style⟩</code> pagestyle, if given, otherwise it uses the empty pagestyle.	
<code>\newlistentry[⟨within⟩]{⟨cntr⟩}{⟨ext⟩}{⟨level-1⟩}</code>	2
Creates the commands necessary for typesetting an entry in the ‘List of ... for the file with extension <code>⟨ext⟩</code> . The entry uses the <code>⟨cntr⟩</code> (possibly <code>⟨within⟩</code>) counter and <code>⟨level-1⟩</code> is the entry’s level minus one.	
<code>\nobookblankpage</code>	15
Declaration for no blank page to be output after a book title page.	
<code>\noDisplayskipStretch</code> No increased display skips.	12
<code>\noglossaryintoc</code>	43
Declaration to prohibit adding glossary title to the ToC.	
<code>\nonzeroparskip</code> Sets the <code>\parskip</code> to a not too terrible value.	11
<code>\nopartblankpage</code>	17
Declaration for not following a part page with a blank one.	
<code>\notedivision</code>	48
Heading printed by the <code>\printnotes</code> and <code>\printnotes*</code> macros.	
<code>\noteentry{⟨notenum⟩}{⟨id⟩}{⟨text⟩}{⟨pagenum⟩}</code>	49
Typesets a pagenote with number <code>⟨notenum⟩</code> , identifier <code>⟨id⟩</code> , contents <code>⟨text⟩</code> , created on page <code>⟨pagenum⟩</code> .	
<code>\noteidinnotes{⟨notenum⟩}{⟨id⟩}</code>	49
Prints an endnote’s number or id in the endnote listing.	
<code>\noteinnotes{⟨text⟩}</code> Prints the text of an endnote.	49
<code>\notenuminnotes{⟨num⟩}</code> Prints an endnote’s number	49
<code>\notenuminnotes{⟨num⟩}</code>	48
Typesets the number <code>⟨num⟩</code> of a page note in the note listing.	
<code>\notenumintext{⟨num⟩}</code>	48
Typesets the number <code>⟨num⟩</code> of a page note in the main text.	
<code>\notepageref</code>	48
Declaration that page numbers are available to notes in the endnote listing.	
<code>\notesname</code> Name for endnotes, default Notes.	48
<code>\nouppercaseheads</code>	13
Declaration preventing uppercasing of titles in the <code>headings</code> pagestyle.	
<code>\NumberPoemTitle</code>	29
Declaration for <code>\PoemTitle</code> to be numbered.	

<code>\oarg{<arg>}</code> prints [<i><arg></i>].	71
<code>\onecolglossaryfalse</code> Declaration for a two column glossary.	44
<code>\onecolglossarytrue</code> Declaration for a single column glossary.	44
<code>\begin{OnehalfSpace}</code>	12
Environment form of <code>\OnehalfSpacing</code>	
<code>\OnehalfSpacing</code>	11
Declaration increasing the baseline to create the illusion of double spacing.	
<code>\overridescapmargin{<margin>}</code>	59
A one-time override of <code>\sidecapmargin</code> .	
 <code>\pageinnotes{<pagenum>}</code>	49
Controls the printing of an endnote's page reference number.	
<code>\pagenotesubhead{<chapapp>}{<num>}{<title>}</code>	50
Typesets a subheading for notes from chapter or appendix <i><chapapp></i> <i><num></i> called <i><title></i> .	
<code>\pagetofootnote</code>	50
Declaration which turns <code>\pagenotes</code> into <code>\footnotes</code> .	
<code>\parg{<arg>}</code> prints (<i><arg></i>).	71
<code>\partblankpage</code>	17
Declaration for following a part page with a blank one.	
<code>\partmark{<forhead>}</code>	16
For setting any marks containing the text of a header for a <code>\part</code> .	
<code>\patchcommand{<macro>}{<start-code>}{<end-code>}</code>	67
Inserts <i><start-code></i> before the current definition of the <i><macro></i> and <i>{<end-code>}</i> at the end of the current definition.	
<i>pedersen</i>	24
A single line chapterstyle in large italics with the number set in the righthand margin. The title and/or number may be colored. The <code>graphicx</code> is required and the <code>color</code> package if you want to color.	
<code>\PlainPoemTitle</code>	29
Declaration for <code>\PoemTitle</code> to be unnumbered.	
<code>\pmname</code>	66
Abbreviation for post meridiem used in <code>\printtime*</code> (default am)	
<code>\pnchap</code>	50
Chapter title for <code>\pagenotesubhead</code> . Defaults to the ToC entry.	
<code>\pnschap</code>	50
Starred chapter title for <code>\pagenotesubhead</code> . Defaults to the regular title.	
<code>\PoemTitle[<fortoc>][<forhead>]{<title>}</code>	29
Typesets the title for a poem and puts it into the ToC.	
<code>\PoemTitle[<fortoc>][<forhead>]{<title>}</code>	30
Typesets an unnumbered title for a poem but does not add it to the ToC.	
<code>\PoemTitlefont</code> Font for the text of a poem title	30
<code>\PoemTitleheadstart</code>	30
Called at the start of typesetting a <code>\PoemTitle</code> .	
<code>\poemtitlemark{<forhead>}</code>	29
Used to set marks for a <code>\PoemTitle</code> .	
<code>\PoemTitlenumfont</code> Font for the number of a poem title	30

<code>\poemtitlestyle</code>	Page style for a <code>\PoemTitle</code> .	29
<code>\poemtitlestarmark{<forhead>}</code>	Used to set marks for a <code>\PoemTitle*</code> .	30
<code>\poemtitlestarpstyle</code>	Page style for a <code>\PoemTitle*</code> .	30
<code>\postnoteinnotes</code>	Called by <code>\noteentry</code> to finish the printing of an endnote.	49
<code>\prechapterprecisshift</code>	Length controlling the vertical space before a chapter precis.	31
<code>\precisfont</code>	Font used for typesetting a chapter precis	31
<code>\preglossaryhook</code>	Vacuous macro called after a glossary title is typeset.	44
<code>\prenoteinnotes</code>	Called by <code>\noteentry</code> to initialise the printing of an endnote.	49
<code>\printbookname</code>	Prints the <code>\bookname</code> using the <code>\booknamefont</code>	16
<code>\printbooknum</code>	Prints the book number using the <code>\booknumfont</code> .	16
<code>\printbooktitle{<title>}</code>	Prints the book title using the <code>\booktitlefont</code> .	16
<code>\printglossary[<file>]</code>	Prints the glossary from file <code>\jobname.gls</code> , or <code>\file.gls</code>	39
<code>\printpageinnotes{<pagenum>}</code>	Prints an endnote's page reference number.	49
<code>\printpagenotes</code>	Input the <code>pagenote ent</code> file for printing, then close it to any more notes.	46
<code>\printpagenotes*</code>	Input the <code>pagenote ent</code> file for printing, then empty it ready for further notes.	46
<code>\printPoemTitlenonum</code>	Used instead of <code>\printPoemTitlenum</code> for an unnumbered <code>\PoemTitle</code> .	30
<code>\printPoemTitlenum</code>	Typesets the number for a <code>\PoemTitle</code> .	30
<code>\printPoemTitletitle{<title>}</code>	Typesets the title of a <code>\PoemTitle</code> .	30
<code>\printtime</code>	Prints the time of day using a 24 hour clock.	66
<code>\printtime*</code>	Prints the time of day using a 12 hour clock.	66
<code>\quarkmarks</code>	Declaration setting trim marks to be in the style of Quark Xpress registration marks.	65
<code>\registrationColour{<mark>}</code>	Command used by <code>\quarkmarks</code> for typesetting a registration mark.	65
<code>\renewleadpage[<page-style>]{<cmdname>}{<title>}</code>	Redefines the <code>\cmdname</code> (see <code>\newleadpage</code>).	17
<code>\renewleadpage* [<page-style>] { <cmdname> } { <title> }</code>	Redefines the <code>\cmdname*</code> (see <code>\newleadpage*</code>).	17
<code>\reparticle</code>	Makes chapter and lower level headings replicate the equivalent article class headings.	18

<i>reparticle</i> Chapter style replicating a section in an article.	18
<code>\RequireAtEndClass{⟨class⟩}{⟨code⟩}</code>	68
Inserts <i>⟨code⟩</i> just after the <i>⟨class⟩</i> class is used, or immediately if <i>⟨class⟩</i> has already been used.	
<code>\RequireAtEndPackage{⟨pack⟩}{⟨code⟩}</code>	68
Inserts <i>⟨code⟩</i> just after the <i>⟨pack⟩</i> package is used, or immediately if <i>⟨pack⟩</i> has already been used.	
<code>\setbvlinenums{⟨first⟩}{⟨startat⟩}</code>	54
Sets the first line of the following boxedverbatim to be <i>⟨first⟩</i> and that the first printed line number to be <i>⟨startat⟩</i> .	
<code>\setDisplayskipStretch{⟨factor⟩}</code>	12
Increase the display skips by gmetafactor.	
<code>\setfloatlocations{⟨float⟩}{⟨locs⟩}</code>	63
Sets the default location for the <i>⟨float⟩</i> (e.g., table) to <i>⟨locs⟩</i> (default <i>tbp</i>).	
<code>\setfootnoterule[⟨fill⟩]{⟨space⟩}{⟨width⟩}{⟨thick⟩}</code>	2
Defines the footnote rule with <i>⟨space⟩</i> between note text and the rule width <i>⟨width⟩</i> and thickness <i>⟨thick⟩</i> . The optional <i>⟨fill⟩</i> is inserted just before the rule is drawn.	
<code>\setsecnumdepth{⟨sec⟩}</code>	31
Sets the <i>secnumdepth</i> counter so that divisions <i>{⟨sec⟩}</i> and above will be numbered.	
<code>\setsidcappos{⟨pos⟩}</code>	58
Declaration of the vertical position of a sidecaption with respect to the float.	
<code>\setsidebarheight{⟨height⟩}</code> Sets the height of sidebars.	51
<code>\setsidebars{⟨hsep⟩}{⟨width⟩}{⟨vsep⟩}{⟨topsep⟩}{⟨font⟩}{⟨height⟩}</code>	52
Sets the several sidebar parameters.	
<code>\setsidecaps{⟨sep⟩}{⟨width⟩}</code>	57
Sets the lengths <i>\sidecapsep</i> and <i>\sidcapwidth</i> to the given values.	
<code>\SetSingleSpace{⟨factor⟩}</code> Change the baselineskip by <i>⟨factor⟩</i>	12
<code>\setverselinenums{⟨first⟩}{⟨startat⟩}</code>	54
Sets the first line of the following verse to be <i>⟨first⟩</i> and that the first printed line number to be <i>⟨startat⟩</i> .	
<code>\showtrimsoff</code>	65
If the <i>showtrims</i> option has been used this declaration switches the trim marks off.	
<code>\showtrimsoff</code>	65
If the <i>showtrims</i> option has been used this declaration switches the trim marks on. It is the default.	
<code>\sidebarmargin{⟨margin⟩}</code> Set the margin(s) for sidebars.	51
<code>\sidebartopsep</code>	51
Length controlling vertical position of the top of sidebars.	
<code>\sidecapfloatwidth{⟨length⟩}</code>	59
Macro holding the width of a float with a sidecaption.	
<code>\sidecapmargin{⟨margin⟩}</code> Sets the the margin for sidecaptions.	57
<code>\sidecapraise</code>	59
Vertical distance added to the default vertical placement of a sidecaption.	
<code>\sidecapsep</code>	57
Length specifying the horizontal separation between a sidecaption and the float.	
<code>\sidecapstyle</code> Style settings for a sidecaption.	58

<code>\begin{sidecaption} [⟨fortoc⟩] {⟨title⟩} [⟨label⟩]</code>	57
Environment for setting a sidecaption.	
<code>\sidecapwidth</code>	57
Length specifying the maximum width of a sidecaption.	
<code>\begin{sidecontcaption} {⟨title⟩} [⟨label⟩]</code>	58
Environment for setting a continued sidecaption.	
<code>\begin{sidelegend} {⟨title⟩} [⟨label⟩]</code>	58
Environment for setting a legend kind of sidecaption.	
<code>\begin{sidenamedlegend} {⟨title⟩} [⟨label⟩]</code>	58
Environment for setting a named legend kind of sidecaption.	
<code>\sidepar [⟨left⟩] {⟨right⟩}</code>	52
Typeset <i>⟨right⟩</i> in the outer margin or, if given, <i>⟨left⟩</i> in the left of verso pages.	
<code>\sideparvshift</code>	52
Vertical adjustment for <code>\sidepar</code> marginal text.	
<code>\begin{SingleSpace}</code> Environment form of <code>\SingleSpacing</code>	12
<code>\SingleSpacing</code>	12
Declaration restoring normal single spacing (or that set by <code>\SetSingleSpace</code>).	
<code>\sloppy</code>	9
Declaration for TeX to allow large interword space variations in justified text lines.	
<code>\sloppybottom</code>	10
Declaration for TeX to allow an extra line at the bottom of a page. The <code>\topskip</code> must have been increased beforehand.	
<code>\begin{sloppypar}</code>	9
Typeset contents of the enclosed paragraph(s) using <code>\sloppy</code> .	
<code>southall</code>	27
A raggedright chapterstyle with the number and title on the same line and a rule below.	
<code>\begin{SingleSpace} {⟨factor⟩}</code>	12
Environment form of <code>\SetSingleSpace</code>	
<code>\subcaptionlabelfont {⟨fontspec⟩}</code>	2
The font for the identifier of a subcaption.	
<code>\subcaptionref {⟨key⟩}</code>	2
Typesets a reference to the subcaption labelled with <i>⟨key⟩</i> using the <code>\subcaptionlabel</code> font.	
<code>\subcaptionref* {⟨key⟩}</code>	2
Typesets a reference to the subcaption labelled with <i>⟨key⟩</i> using the normal font.	
<code>\textheight</code> The height of the textblock	7
<code>thatcher</code>	27
A centered small caps chapterstyle with the number line separated from the title by a short rule.	
<code>\begin{theglossary}</code> Environment for typesetting a glossary.	39
<code>\thepoem</code> Typeset the current Poem Title number	29
<code>\tightlists</code>	55
Declaration for removing vertical spacing from list-based environments. Half a <code>\onelineskip</code> may be added before and after.	

<code>\tightlists*</code>	55
Declaration for removing vertical spacing from list-based environments. There is no additional space before or after.	
<code>\topskip</code>	7
The height of the first line of text on a page. This is usually less than the <code>\baselineskip</code> .	
<code>\traditionalparskip</code>	11
Sets the <code>\parskip</code> to its traditional (zero) value.	
<code>\uppercaseheads</code>	13
Declaration ensuring uppercasing of titles in the <i>headings</i> pagestyle.	
<code>veelo</code>	27
A raggedleft large bold chapterstyle with a large black square in the margin by the number line. It requires the <i>graphicx</i> package.	
<code>\begin{verbatimoutput}{\langle file \rangle}</code>	2
Environment whose contents will be written verbatim to the <i>\langle file \rangle</i> file.	
<code>\verselinenumbersleft</code>	54
Declaration to have any verse line numbers set to the left of the lines.	
<code>\verselinenumbersright</code>	54
Declaration to have any verse line numbers set in the righthand margin. This is the default.	
<code>verville</code>	27
A single line, large, centered, chapterstyle with rules above and below.	
<code>\vleftmargin</code> Minimum left margin for verse.	53
<code>\vleftoffline{\langle text \rangle}</code> Puts <i>\langle text \rangle</i> at the left of a line of verse.	52
<code>\begin{vminipage}[\langle pos \rangle][\langle height \rangle][\langle innerpos \rangle]{\langle width \rangle}</code>	55
Vertical minipage environment taking the same arguments as <i>minipage</i> . It forms a paragraph by itself.	
<code>\begin{vplace}[\langle num \rangle]</code>	66
The contents of this environment are centered vertically. The optional <i>\langle num \rangle</i> argument can be used to specify the ratio of the upper space to the lower space.	
<code>\begin{writeverbatim}{\langle stream \rangle}</code>	2
Environment whose contents will be written verbatim to the <i>\langle stream \rangle</i> output stream.	
<code>\xindyindex</code>	38
Declaration to be put in the preamble when the <i>xindy</i> program will be used to process the raw index.	

Bibliography

- [AHK90] Paul W. Abrahams, Kathryn Hargreaves and Karl Berry. *TeX for the Impatient*. Addison-Wesley, 1990. (Available at <ftp://tug.org/tex/impatient>)
- [CB99] Warren Chappell and Robert Bringhurst. *A Short History of the Printed Word*. Hartley & Marks, 1999, ISBN 0-88179-154-7.
- [CH88] Pehong Chen and Michael A. Harrison. *Index Preparation and processing*. September 1988. (Available from CTAN in [indexing/makeindex/paper](#))
- [Dow00] Michael J. Downes. *The patchcmd package*. July 2000. (Available from CTAN in [macros/latex/contrib/patchcmd](#))
- [CMS93] John Grossman (Managing Editor). *The Chicago Manual of Style*. Fourteenth Edition. University of Chicago Press, 1993.
- [LEB04] Leslie Lamport, Victor Eijkhout and Johannes Braams. *NTG Document Classes for LaTeX version 2e*. June 2004. (Available from CTAN in [macros/latex/contrib/ntg](#))
- [MG⁺04] Frank Mittelbach, Michael Goossens, et al. *The LaTeX companion: Second Edition*. Addison-Wesley, 2004. ISBN 0-201-36299-6.
- [Tal06] Nicola L. C. Talbot. *datetime.sty: Formatting Current Date and Time*. December 2006. (Available from CTAN in [macros/latex/contrib/datetime](#))
- [Tob00] Geoffrey Tobin. *setspace.sty*. December 2000. (Available from CTAN in [macros/latex/contrib/setspace](#))
- [Wil04] Peter Wilson. Glisterings. TUGboat, 25, 2 pp 201–202, 2004.
- [Wil07] Peter Wilson. *Some Examples of Title Pages*. Herries Press, 2007. (Available from CTAN in [info/latex-samples/titlepages.pdf](#))

Index

The first page number is usually, but not always, the primary reference to the indexed topic.

@

\@@wrglom@m, 40
\@dblfpbot, 63
\@dblftop, 63
\@fpbot, 63
\@fptop, 63
\@pnumwidth (length), 36

A

\abnormalparskip, 11
abstract (package), 67
Adams, William, 21, 65
\addtocontents, 36
\addtonotes, 50
afterbook (pagestyle), 15
\afterbookskip, 16
afterpart (pagestyle), 17
\afterpartskip, 1
\afterPoemTitle, 30, 31
\afterPoemTitlenum, 30, 31
\afterPoemTitleskip (length), 30
alg (package), 3, 4
algorithm (package), 3
algorithmic (package), 3
\amname, 65, 66
appendix (package), 67
\appendixname, 50
array (package), 67
Arseneau, Donald, 9, 51, 67
article (class), 17, 18
article (option), xiii, 17, 18, 31

\AtBeginClass, 68
\AtBeginDocument, 67
\AtBeginFile, 68
\AtBeginPackage, 68
\AtEndClass, 68
\AtEndDocument, 67
\AtEndFile, 68
\AtEndOfClass, 67, 68
\AtEndOfPackage, 67–69
\AtEndPackage, 68, 69
\atendtheglossaryhook, 44

B

\backmatter, xiii
\baselineskip (length), 7, 8, 11, 12, 55
\beforebookskip, 16
\beforepartskip, 1
\beforePoemTitleskip (length), 30
\begintheglossaryhook, 44
bianchi (chapterstyle), 21
Bianchi, Stefano, 21
\bibmark, 4
\book, 15, 16, 37, 70
book (pagestyle), 15
\book*, 15, 70
\bookblankpage, 15
\bookmark, 15
\bookname, 16
\booknamefont, 16
\booknamenum, 16
\booknumfont, 16
booktabs (package), 67

\booktitlefont, 16
 boxedverbatim (environment), 54
bringham (chapterstyle), 21
brotherton (chapterstyle), 21
 \bs, 71
 \bvendofpage, 54

C

calc (package), 7, 51
 \caption, 45, 71
 caption (package), 4
 \captionnamefont, 59
 \captiontitlefinal, 60
 ccaption (package), 67
 \centering, 31, 60
 \cftappendixname, 33
 \cftbeforebookskip (length), 37
 \cftbookaftersnum, 37
 \cftbookaftersnumb, 37
 \cftbookdotsep, 37
 \cftbookfont, 37
 \cftbookformatpnum, 37
 \cftbookindent (length), 37
 \cftbookleader, 37
 \cftbookname, 37
 \cftbooknumwidth (length), 37
 \cftbookpagefont, 37
 \cftbookpresnum, 37
 \cftchapterformatpnum, 36
 \cftchaptername, 33
 \cftfigureformatpnum, 36
 \cftfigurename, 34
 \cftinsertcode, 36, 37
 \cftinserthook, 36, 37
 \cftparagraphformatpnum, 36
 \cftparagraphname, 34
 \cftpartformatpnum, 36
 \cftpartname, 33
 \cftsectionformatpnum, 36
 \cftsectionname, 34
 \cftsubfigureformatpnum, 36
 \cftsubparagraphformatpnum, 36
 \cftsubparagraphname, 34
 \cftsubsectionformatpnum, 36
 \cftsubsectionname, 34
 \cftsubsubsectionformatpnum, 36

\cftsubsubsectionname, 34
 \cftsubtableformatpnum, 36
 \cfttableformatpnum, 36
 \cfttablename, 34
 \changeGLOSSactual, 43
 \changeGLOSSnum, 43
 \changeGLOSSnumformat, 43
 \changeGLOSSref, 43
chappell (chapterstyle), 19, 23
 \chapter, 17, 29, 33, 70
chapter (pagestyle), 38
 \chapter*, 70
 chapterbib (package), xiii
 \chaptername, 50
 chapterstyle,
 bianchi, 21
 bringham, 21
 brotherton, 21
 chappell, 19, 23
 culver, 23
 dash, 24
 default, 21, 24
 demo, 19–21, 24
 demo2, 20, 21, 24
 demo3, 15, 21, 24
 ell, 24
 ger, 24
 lyhne, 24
 madsen, 24
 pedersen, 15, 21, 24
 reparticle, 17
 southall, 18, 27
 thatcher, 27
 veelo, 27
 verville, 27
 \checkandfixthelayout, 7, 10, 52, 57
 \checkthelayout, 7
 chngcntr (package), 67
 class, xiii
 article, 17, 18
 memoir, xiii, xv, xvii, 4
 \cmd, 71
 \cmdprint, 71
 color (package), 24
 \colorchapnum, 27
 \colorchaptitle, 27
 Connes, Frederic, 15, 38

\continuousnotenums, 48
 counter,
 maxsecnumdepth, 31, 32
 pagenote, 48, 49
 secnumdepth, 31, 32
 crop (package), 67
 \cs, 71
 culver (chapterstyle), 23
 Culver, Christopher, 23

D

dash (chapterstyle), 24
 datetime (package), 66
 dcolumn (package), 67
 default (chapterstyle), 21, 24
 \defaultlists, 55
 delarray (package), 67
 demo (chapterstyle), 19–21, 24
 demo2 (chapterstyle), 20, 21, 24
 demo3 (chapterstyle), 15, 21, 24
 description (environment), 55
 \DisemulatePackage, 67
 document (environment), 67
 \DoubleSpacing, 11, 12
 Downes, Michael, 10, 67
 Dye, Thomas, 18, 27

E

ell (chapterstyle), 24
 Els, Danie, 3, 17, 33
 \em, xv, 63
 \emminnershape, 63
 \emph, xv, 63
 empty (pagestyle), 15, 17
 \EmulatedPackage, 67
 \EmulatedPackageWithOptions, 67
 \endnote, 46
 endnotes (package), 46
 \enlargethispage, 10
 ent (file), 46–50
 enumerate (environment), 55
 enumerate (package), 67
 environment,
 boxedverbatim, 54
 description, 55

document, 67
 enumerate, 55
 figure, 63
 itemize, 55
 list, 53–55
 midsloppypar, 9
 minipage, 12, 55, 56, 59, 60
 minpage, 55
 picture, 33
 sidecaption, 57, 58, 60
 sidecontcaption, 58
 sidelegend, 58
 sidenamedlegend, 58
 sloppypar, 9
 table, 63
 tabular, 60
 thebibliography, 43
 theglossary, 39, 43
 theindex, 43
 titlingpage, 1
 verbatimoutput, 2
 verse, 53, 54
 vminipage, 12, 55, 56
 vplace, 66
 writeverbatim, 2
 epigraph (package), 67
 \everydisplay, 12
 \everylistparindent (length), 55

F

fancyhdr (package), 67
 \feetbelowfloat, 2
 figure (environment), 63
 file,
 ent, 46–50
 log, 67
 sty, 36
 toc, 46
 \firmlists, 55
 \firmlists*, 55
 float (package), 3, 4
 \flushbottom, 7
 \footnote, 46, 50
 \foottopagenote, 50
 Ford, Matthew, 53
 framed (package), 67

\frontmatter, 70

\fussy, 9

\futurelet, 67

G

Garcia, Gerardo, 24

geometry (package), 67

ger (chapterstyle), 24

\glossary, 39, 40, 45

\glossarycolsep (length), 44

\glossaryentry, 41

\glossaryintoc, 43, 44

\glossarymark, 43, 44

\glossaryname, 43

\glossaryrule (length), 44

\glossitem, 39, 40, 43, 45

graphicx (package), 24, 27

H

headings (pagestyle), 13

\hmpunct, 65, 66

\hrule, 54

hyperref (package), 38, 68, 69

Høgholm, Morten, 7

I

sidecapfloatwidth, 59

\idtextinnotes, 49

\ifanappendix, 1

\ifetex, 69

ifmtarg (package), 67

\ifpdf, 69

ifpdf (package), 67

\ifscapmargleft, 57, 58

\ifxetex, 66

\include, 68

index (package), 67

\indexmark, 4

indextitlepagestyle (pagestyle), 38

\input, 68

\InputIfFileExists, 69

itemize (environment), 55

K

\kern, 54

L

\large, 30

\leadpagetoclevel, 17

\leftmargini (length), 53

\legend, 71

length,

\@pnumwidth, 36

\afterPoemTitleskip, 30

\baselineskip, 7, 8, 11, 12, 55

\beforePoemTitleskip, 30

\cftbeforebookskip, 37

\cftbookindent, 37

\cftbooknumwidth, 37

\everylistparindent, 55

\glossarycolsep, 44

\glossaryrule, 44

\leftmargini, 53

\linewidth, 59

\listparindent, 54, 55

\marginparsep, 57

\marginparwidth, 57

\midPoemTitleskip, 30

\onelineskip, 55

\parindent, 11, 55

\parskip, 11

\prechapterprecisshift, 31

\sidebarhsep, 52

\sidebartopsep, 51, 52

\sidebarvsep, 52

\sidebarwidth, 52

\sidecapraise, 59

\sidecapsep, 57, 59

\sidecapwidth, 57

\sideparvshift, 52

\textheight, 7, 8, 52

\topskip, 7, 8, 10

\vleftmargin, 53, 54

\linewidth (length), 59

list (environment), 53–55

\listparindent (length), 54, 55

\LoadClass, 68

log (file), 67

Luecking, Daniel, 35, 52

lyhne (chapterstyle), 24

Lyhne, Anders, 24

M

madsen (chapterstyle), 24
 Madsen, Lars, 17, 24, 34, 36
 \mainmatter, xiii
 \makeglossary, 39, 43
 makeidx (package), 67
 \makeindex, 38
 MakeIndex (program), 38–40, 46
 \makepagenote, 46
 \maketitle, 33
 \marg, 71
 \marginpar, xiii, 52
 \marginparsep (length), 57
 \marginparwidth (length), 57
 maxsecnumdepth (counter), 31, 32
 \memappchapinfo, 70
 \memappchapstarinfo, 70
 \memapppageinfo, 70
 \memapppagestarinfo, 70
 \membicaptioninfo, 71
 \membionenumcaptioninfo, 71
 \membitwonumcaptioninfo, 71
 \membookinfo, 70
 \membookstarinfo, 70
 \memcaptioninfo, 71
 \memchapinfo, 70
 \memchapstarinfo, 70
 \memdskips, 12
 \memdskipstretch, 12
 \memglodesc, 41
 \memglonum, 41
 \memgloref, 41
 \memgloterm, 41
 \memgobble, 65
 memhfixc (package), 68, 69
 \memhyperindexfalse, 38
 \memjustarg, 65
 \memleadpageinfo, 70
 \memleadpagestarinfo, 70
 \memlegendinfo, 71
 \memnamedlegendinfo, 71
 memoir (class), xiii, xv, xvii, 4
 \mempartinfo, 70
 \mempartstarinfo, 70

mempatch (package), 35
 \mempoeminfo, 71
 \mempoemstarinfo, 71
 \memPoemTitleinfo, 71
 \memPoemTitlestarinfo, 71
 \memsecinfo, 70
 \memsecstarinfo, 70
 \meta, 71
 \midbookskip, 16
 \midpartskip, 1
 \midPoemTitleskip (length), 30
 \midsloppy, 9
 midsloppypar (environment), 9
 Miletic, Filip, 3
 minipage (environment), 12, 55, 56, 59, 60
 minpage (environment), 55
 moreverb (package), 67

N

natbib (package), xiii, 38
 needspace (package), 67
 \newcommand, 3, 17
 newfile (package), 67
 \newfloat, 3
 \newleadpage, 17
 \newleadpage*, 17
 \newlistentry, 2, 34
 \newsfloat, 34
 nextpage (package), 67
 \nobookblankpage, 15
 \noDisplayskipStretch, 12
 \noglossaryintoc, 43, 44
 \nonzeroparskip, 11
 \nopartblankpage, 17
 \notedivision, 48, 50
 \noteentry, 49
 \noteidinnotes, 49
 \noteinnotes, 49
 \notenuminnotes, 48, 49
 \notenumintext, 48
 \notepageref, 48, 49
 \notesname, 48
 \nouppercaseheads, 13
 \NumberPoemTitle, 29

O

\oarg, 71
 Oberdiek, Heiko, 69
 \onecolglossaryfalse, 44
 \onecolglossarytrue, 44
 \OnehalfSpacing, 11, 12
 \onelineskip (length), 55
 oneside (option), 8
 option,
 article, xiii, 17, 18, 31
 oneside, 8
 sectionbib, xiii
 showtrims, 65
 twoside, 8, 9
 \overridescapmargin, 59

P

package,
 abstract, 67
 alg, 3, 4
 algorithm, 3
 algorithmic, 3
 appendix, 67
 array, 67
 booktabs, 67
 calc, 7, 51
 caption, 4
 ccaption, 67
 chapterbib, xiii
 chngcntr, 67
 color, 24
 crop, 67
 datetime, 66
 dcolumn, 67
 delarray, 67
 endnotes, 46
 enumerate, 67
 epigraph, 67
 fancyhdr, 67
 float, 3, 4
 framed, 67
 geometry, 67
 graphicx, 24, 27
 hyperref, 38, 68, 69
 ifmtarg, 67

 ifpdf, 67
 index, 67
 makeidx, 67
 memhfixc, 68, 69
 mempatch, 35
 moreverb, 67
 natbib, xiii, 38
 needspace, 67
 newfile, 67
 nextpage, 67
 pagenote, 46, 67
 parskip, 67
 patchcmd, 67
 setspace, 11, 67
 shortvrb, 67
 showidx, 67
 sidecap, 67
 subfigure, 67
 tabularx, 67
 titleref, 67
 titlesec, 67
 tocbibind, 67
 tocloft, 67
 verbatim, 67
 verse, 67
 wrapfig, 60
 \pageinnotes, 49
 \pagenote, 46, 48–50
 pagenote (counter), 48, 49
 pagenote (package), 46, 67
 \pagenotesubhead, 50
 pagestyle,
 afterbook, 15
 afterpart, 17
 book, 15
 chapter, 38
 empty, 15, 17
 headings, 13
 indextitlepagestyle, 38
 \pagetofootnote, 50
 \parg, 71
 \parindent (length), 11, 55
 parskip (package), 67
 \parskip (length), 11
 \part, 15–17, 33, 70
 \part*, 70
 \partblankpage, 17

\partmark, 16, 17
 patchcmd (package), 67
 \patchcommand, 67
 pedersen (chapterstyle), 15, 21, 24
 Pedersen, Troels, 24
 picture (environment), 33
 \PlainPoemTitle, 29
 \pmname, 65
 \pmname, 66
 \pnchap, 50
 \pnschap, 50
 \PoemTitle, 29, 30, 70
 \poemtitle, 29, 70
 \PoemTitle*, 29, 30
 \PoemTitlefont, 30
 \PoemTitleheadstart, 30
 \poemtitlemark, 29
 \PoemTitlenumfont, 30
 \poemtitlepstyle, 29
 \poemtitlestarmark, 29, 30
 \poemtitlestarpstyle, 29, 30
 \postnoteinnotes, 49
 \prechapterprecisshift (length), 31
 \precisfont, 31
 \preglossaryhook, 44
 \prenoteinnotes, 49
 \printbookname, 16
 \printbooknum, 16
 \printbooktitle, 16
 \printglossary, 39, 46
 \printnotes, 48
 \printnotes*, 48, 50
 \printpageinnotes, 49
 \printpagenotes, 46, 47
 \printpagenotes*, 46, 47
 \printPoemTitlenum, 30
 \printPoemTitlenum, 30
 \printPoemTitletitle, 30, 31
 \printtime, 65, 66
 \printtime*, 65, 66
 program,
 MakeIndex, 38–40, 46
 xindy, 38
 \protect, 50

Q

\quarkmarks, 65, 66

R

\raggedbottom, 2, 3, 10
 \raggedleft, 60
 \raggedright, 60
 \registrationColour, 65
 \renewcommand*, 59
 \renewleadpage, 17
 \renewleadpage*, 17
 \reparticle, 18
 reparticle (chapterstyle), 17
 \RequireAtEndClass, 68
 \RequireAtEndPackage, 68

S

\scapmargleftfalse, 57
 \scapmarglefttrue, 57
 secnumdepth (counter), 31, 32
 \section, 17, 70
 sectionbib (option), xiii
 \setbvlínenums, 54
 \setDisplayskipStretch, 12
 \setfloatlocations, 63
 \setfootnoterule, 2
 \setlength, 59
 \setmarginnotes, 52, 57
 \setsecnumdepth, 31
 \setsidecaps, 57
 \setsidebarheight, 51, 52
 \setsidebars, 51, 52
 \setsidecappos, 58
 \setsidecaps, 57
 \SetSingleSpace, 12
 setspace (package), 11, 67
 \setverselínenums, 54
 shortvrb (package), 67
 showidx (package), 67
 showtrims (option), 65
 \showtrimsoff, 65
 \showtrimson, 65
 \sidebar, 51
 \sidebarfont, 52
 \sidebarhsep (length), 52
 \sidebarmargin, 51

\sidebaronesidefalse, 51
 \sidebaronesidettrue, 51
 \sidebartopsep (length), 51, 52
 \sidebarvsep (length), 52
 \sidebarwidth (length), 52
 sidecap (package), 67
 \sidecapfloatwidth, 59
 \sidecapmargin, 57, 59
 \sidecapraise (length), 59
 \sidecapsep (length), 57, 59
 \sidecapstyle, 58
 sidecaption (environment), 57, 58, 60
 \sidecapwidth (length), 57
 sidecontcaption (environment), 58
 sidelegend (environment), 58
 sidenamedlegend (environment), 58
 \sidepar, 52
 \sideparvshift (length), 52
 \SingleSpacing, 12
 \sloppy, 9
 \sloppybottom, 10
 sloppypar (environment), 9
 southall (chapterstyle), 18, 27
 \space, 16
 \strictpagechecktrue, 59
 sty (file), 36
 \subcaptionlabelfont, 2
 \subcaptionref, 2
 \subcaptionref*, 2
 subfigure (package), 67
 \subsection, 70

T

table (environment), 63
 \tableofcontents, xiii
 tabular (environment), 60
 tabularx (package), 67
 \textheight (length), 7, 8, 52
 thatcher (chapterstyle), 27
 Thatcher, Scott, 27
 thebibliography (environment), 43
 \thebook, 16
 theglossary (environment), 39, 43
 theindex (environment), 43
 \thepoem, 29
 \tightlist*, 55

\tightlists, 55
 \tightlists*, 55
 titleref (package), 67
 titlesec (package), 67
 titlingpage (environment), 1
 toc (file), 46
 tocbibind (package), 67
 tocloft (package), 67
 \topskip (length), 7, 8, 10
 \traditionalparskip, 11
 twoside (option), 8, 9

U

\uppercaseheads, 13
 \usepackage, 67, 68

V

veelo (chapterstyle), 27
 Veelo, Baastian, 27
 verbatim (package), 67
 verbatimoutput (environment), 2
 verse (environment), 53, 54
 verse (package), 67
 \verselinenumbersleft, 54
 \verselinenumbersright, 54
 verville (chapterstyle), 27
 Verville, Guy, 27
 \vleftmargin (length), 53, 54
 \vleftofline, 52, 53
 vminipage (environment), 12, 55, 56
 vplace (environment), 66

W

wrapfig (package), 60
 writeverbatim (environment), 2

X

\xetextfalse, 66
 \xetextrue, 66
 xindy (program), 38
 \xindyindex, 38

Z

Zoonekynd, Vincent, 33